

SDP for the WebRTC

draft-nandakumar-rtcweb-sdp-01

Abstract

The Web Real-Time Communication (WebRTC) [**WEBRTC**] working group is charged to provide protocol support for direct interactive rich communication using audio, video and data between two peers' web browsers. Within the WebRTC framework, Session Description protocol (SDP) [**RFC4566**] is used for negotiating session capabilities between the peers. Such a negotiation happens based on the SDP Offer/Answer exchange mechanism described in the RFC 3264 [**RFC3264**].

This document serves an introductory purpose in describing the role of SDP for the most common WebRTC use-cases.

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on August 27, 2013.

Copyright Notice

Copyright (c) 2013 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

- [**1. Introduction**](#)
- [**2. Terminology**](#)
- [**3. SDP and the WebRTC**](#)
- [**4. Offer/Answer and the WebRTC**](#)
- [**5. WebRTC Session Description Examples**](#)
 - [**5.1. Secure Two-Way Audio, Video and Data with RTCP Feedback**](#)
 - [**5.2. Secure Two-way Audio, Video, Data and remove data stream**](#)
 - [**5.3. Secure Two-Way Audio, Video w/BUNDLE Support Unknown**](#)
 - [**5.4. Secure Two-Way Audio, Video w/BUNDLE Support Known**](#)
 - [**5.5. Secure Two-Way Audio, Video w/BUNDLE Unsupported**](#)
 - [**5.6. Successful One Way Session with 2 Video Streams**](#)
 - [**5.7. Add New Media \(video\)**](#)
 - [**5.8. Successful Simulcast with 2 Encodings, 2 Cameras**](#)
 - [**5.9. Successful SVC Video Stream**](#)
- [**6. WebRTC <-> Legacy Interop Examples**](#)
 - [**6.1. Secure Two-Way Audio, Video w/Feedback - WebRTC <-> Legacy Interop**](#)
- [**7. IANA Considerations**](#)
- [**8. Change Log**](#)
- [**9. References**](#)
 - [**9.1. Normative References**](#)
 - [**9.2. Informative References**](#)
- [**§ Authors' Addresses**](#)

1. Introduction

Javascript Session Exchange Protocol(JSEP) [\[JSEP\]](#) specifies a generic protocol needed to generate [\[RFC3264\]](#) offers and answers negotiated between the WebRTC peers for setting up, updating and tearing down a multimedia session. For this purpose, SDP is used to construct [\[RFC3264\]](#) offers/answers for describing (media and non-media) streams as appropriate for recipients of a session description to participate in the session.

The remainder of this document is organized as follows: Section 3 and 4 provide an overview of SDP and the Offer/Answer exchange mechanism. Section 5 and 6 provide sample SDP usages for the most common WebRTC use-cases.

2. Terminology

TOC

The key words "MUST", "MUST NOT", "REQUIRED", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [\[RFC2119\]](#).

3. SDP and the WebRTC


TOC

The purpose of this section is to provide a general overview of SDP and its components. For a more in-depth understanding, the readers are advised to refer to the [\[RFC4566\]](#).

The Session Description Protocol (SDP) [\[RFC4566\]](#) describes multimedia sessions, which can be audio, video, whiteboards, fax, modem, and other streams. It provides a general purpose, standard representation to describe various aspects of multimedia session such as media capabilities, transport addresses and related metadata in a transport agnostic manner, for the purposes of session announcement, session invitation and parameter negotiation.

As of today SDP is widely used in the context of Session Initiation Protocol, Real-time Transport Protocol, and Real-time Streaming Protocol.

Below figure introduces high-level breakup of SDP into components that semantically describe a multimedia session, in our case, say, a WebRTC session [\[WEBRTC\]](#). It by no means captures everything about SDP and hence, should be used for informational purposes only.

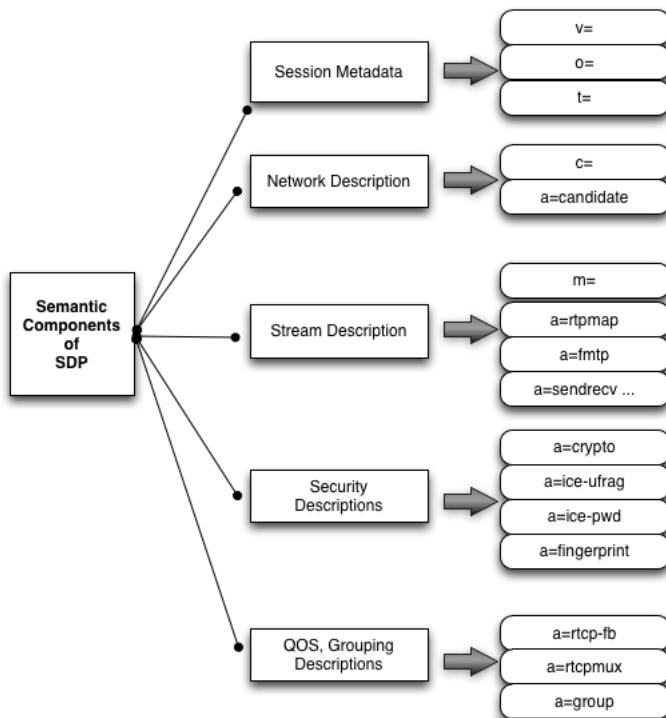

[\[WEBRTC\]](#) proposes JavaScript application to fully control the signaling plane of a multimedia session as described in the JSEP specification [\[JSEP\]](#). JSEP provides mechanisms to create session characterisation and media definition information to conduct the session based on SDP exchanges.

In this context, SDP serves two purposes:

Provide grammatical structure syntactically

Semantically convey participant's intention and capabilities.

4. Offer/Answer and the WebRTC

TOC

This section introduces SDP Offer/Answer Exchange mechanism mandated by WebRTC for negotiating session capabilities while setting up, updating and tearing down a WebRTC session. This section is intentionally brief in nature and interested readers are recommended to [\[RFC3264\]](#) for specific details on the protocol operation.

The Offer/Answer [\[RFC3264\]](#) model specifies rule for the bilateral exchange of Session Description Protocol (SDP) messages for creation of multimedia streams. It defines protocol with involved participants exchanging desired session characteristics from each other's perspective modelled on SDP to negotiate the session between them.

In the most basic form, the protocol operation begins by one of the participants sending an initial SDP offer describing its intent to start a multimedia communication session. The participant receiving the offer MAY generate an SDP answer accepting the offer or it MAY reject the offer. If the session is accepted the offer/answer model guarantees a common view of the multimedia session between the participants.

At any time, either participant MAY generate a new SDP offer that updates the session in progress.

Within the context of WebRTC, the Offer/Answer model defines the state-machinery for WebRTC peers to negotiate session descriptions between them during initial setup stages as well as for eventual session updates. Javascript Session Establishment Protocol specification [\[JSEP\]](#) for WebRTC provides the mechanism for generating [\[RFC3264\]](#) SDP offers and answers in order for both sides of the session to agree upon details such as list of media formats to be sent/received, bandwidth information, crypto parameters, transport parameters, for example.

The following sections provide samples of SDP message details and exchanges for the most common WebRTC usecases.

5. WebRTC Session Description Examples

TOC

A typical web based real-time multimedia communication session can be characterized as below:

It has zero or more Audio only, Video only or Audio/Video Media streams

MAY contain zero or more non-media data streams

All the streams are secured with DTLS/SRTP

ICE processing for NAT Traversal

Sessions over IPv4-only, IPv6-only, dual-stack based clients.

As mentioned earlier [\[WEBRTC\]](#) proposes using SDP based Offer/Answer model to negotiate multimedia session between peers' browsers. Building on the concepts from the previous sections, the following subsections attempts to describe the usage of SDP for the most common WebRTC use-cases.


In all the use-cases, Alice and Bob are assumed to be the WebRTC peers unless mentioned otherwise. Pointers to appropriate RFCs and notes are provided, wherever necessary, against the SDP lines.

5.1. Secure Two-Way Audio, Video and Data with RTCP Feedback

TOC

This use-case allows two users to participate in a two-way communication session securely on their WebRTC enabled Web browsers.

Two-Way Secure Audio, Video, Data with RTCP Feedback

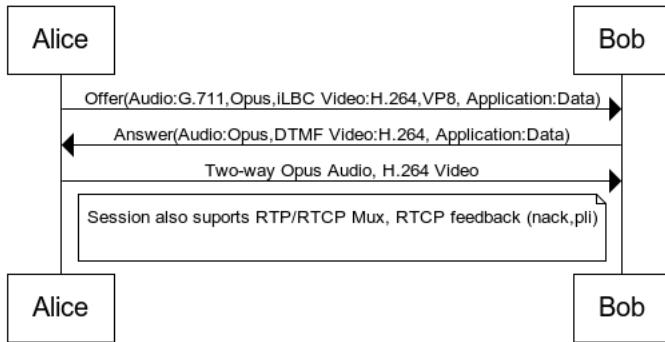

More specifically, this use-case demonstrates following aspects of a WebRTC session

- SRTP with DTLS based encryption
- RTP and RTCP Muxing
- RTCP based feedback and reduced size support
- ICE processing for NAT Traversal
- Audio Codec Offered : PCMU, Opus, iLBC
- Audio Codec Answered : Opus
- Video Codecs Offered: H.264, VP8
- Video Codecs Answered: H.264
- Data Channel Support

The tables (5.1 and 5.2) below capture in detail, the initial SDP Offer and Answer messages exchanged.

The exact SDP parameters specified for Data-Channel is still under the WG discussion and is expected to be updated once a decision is made.

SDP Contents	RFC#/Notes
v=0	[RFC4566]
o=alice 20518 0 IN IP4 0.0.0.0	[RFC4566] - Session Origin Information
s=	[RFC4566]
t=0 0	[RFC4566]
a=ice-ufrag:074c6550	[RFC5245] - Session Level ICE parameter
a=ice-pwd:a28a397a4c3f31747d1ee3474af08a068	[RFC5245] - Session Level ICE parameter
a=fingerprint:sha-1 99:41:49:83:4a:97:0e:1f:ef:6d:f7:c9:c7:70:9d:1f:66:79:a8:07	[RFC5245] - Session DTLS Fingerprint for SRTP
a=rtp-rsize	[RFC5506] - Alice intends to use reduced size RTCP for this session
m=audio 54609 RTP/SAVPF 0 109 98	[RFC4566]
c= IN IP4 24.23.204.141	[RFC4566]
a=rtpmap:0 PCMU/8000	[RFC3551]
a=rtpmap:109 opus/48000	[draft-spittka-payload-rtp-opus]
a=ptime:20	[draft-spittka-payload-rtp-opus]
a=rtpmap:98 iLBC/8000 a=fmtp:98 mode=20	[RFC3952]
a=sendrecv	[RFC3264] - Alice can send and recv audio
a=rtp-mux	[RFC5761] - Alice can perform RTP/RTCP Muxing on port 54609
b=AS:256	[RFC4566]
b=RS:0	[RFC3556]
b=RR:0	[RFC3556]
a=candidate:0 1 UDP 2113667327 192.168.1.4 54609 typ host	[RFC5245] - Host ICE Candidate

a=candidate:1 1 UDP 694302207 24.23.204.141 54609 typ srflx raddr 192.168.1.4 rport 54609	[RFC5245] - Server Reflexive ICE Candidate for the above host candidate
a=candidate:0 2 UDP 2113667326 192.168.1.4 64678 typ host	[RFC5245] - Second Host Candidate
a=candidate:1 2 UDP 1694302206 24.23.204.141 64678 typ srflx raddr 192.168.1.4 rport 64678	[RFC5245] - Server Reflexive Candidate for the Second Host Candidate
a=rtp-fb:109 nack	[RFC5104] - Indicates NACK RTCP feedback support
m=video 62537 RTP/SAVPF 99 120	[RFC4566]
c= IN IP4 24.23.204.141	[RFC4566]
a=rtpmap:99 H264/90000	[RFC3984]
a=fmtp:99 profile-level-id=4d0028;packetization-mode=1	[RFC3984]
a=rtpmap:120 VP8/90000	[draft-ietf-payload-vp8]
a=sendrecv	[RFC3264] - Alice can send and recv video
a=rtp-mux	[RFC5761] - Alice can perform RTP/RTCP Muxing on port 62537
a=candidate:0 1 UDP 2113667327 192.168.1.4 62537 typ host	[RFC5245]
a=candidate:1 1 UDP 1694302207 24.23.204.141 62537 typ srflx raddr 192.168.1.4 rport 62537	[RFC5245]
a=candidate:0 2 2113667326 192.168.1.4 54721 typ host	[RFC5245]
a=candidate:1 2 UDP 1694302206 24.23.204.141 54721 typ srflx raddr 192.168.1.4 rport 54721	[RFC5245]
a=rtp-fb:99 nack pli	[RFC5104] - Indicates support for Picture loss Indication and NACK
a=rtp-fb:99 ccm fir	[RFC5104] - Full Intra Frame Request-Codec Control Message support
a=rtp-fb:120 nack pli	[RFC5104] - Indicates support for Picture loss Indication and NACK
a=rtp-fb:120 ccm fir	[RFC5104] - Full Intra Frame Request-Codec Control Message support
m=application 56966 DTLS/SCTP 5000	[draft-ietf-rtcweb-data-channel]
c= IN IP4 24.23.204.141	[RFC4566]
a=sctpmap:5000 webrtc-Datachannel 1	[draft-ietf-mmusic-sctp-sdp] - One data stream of type chat
a=webrtc-Datachannel:5000 stream=1;label="channel 1";subprotocol="chat";	[draft-ietf-mmusic-sctp-sdp]
a=sendrecv	[RFC3264] - Alice can send and recv non-media data
a=rtp-mux	[RFC5761] - Alice can perform RTP/RTCP Muxing on port 56966
a=candidate:0 1 UDP 2113667327 192.168.1.7 56966 typ host	[RFC5245]
a=candidate:1 1 UDP 1694302207 24.23.204.141 56966 typ srflx raddr 192.168.1.7 rport 56966	[RFC5245]
a=candidate:0 2 UDP 2113667326 192.168.1.7 51641 typ host	[RFC5245]
a=candidate:1 2 UDP 1694302206 24.23.204.141 51641 typ srflx raddr 192.168.1.7 rport 51641	[RFC5245]
a=rtp-fb:5000 nack	[RFC5104] - Indicates NACK feedback support for the data-channel

Table 1: 5.1 SDP Offer

SDP Contents	RFC#/Notes
v=0	[RFC4566]
o=bob 16833 0 IN IP4 0.0.0.0	[RFC4566] - Session Origin Information
s=	[RFC4566]
t=0 0	[RFC4566]
a=ice-ufrag:c300d85b	[RFC5245] - Session Level ICE username frag
a=ice-pwd:de4e99bd291c325921d5d47efbabd9a2	[RFC5245] - Session Level ICE password
a=fingerprint:sha-1 99:41:49:83:4a:97:0e:1f:ef:6d:f7:c9:c7:70:9d:1f:66:79:a8:07	[RFC5245] - Session DTLS Fingerprint for SRTP
a=rtp-rsize	[RFC5506] - Alice intends to use reduced size RTCP for this session
m=audio 49203 RTP/SAVPF 109	[RFC4566]
c= IN IP4 98.248.92.77	[RFC4566]
a=rtpmap:109 opus/48000	[draft-spittka-payload-rtp-opus]
a=ptime:20	[draft-spittka-payload-rtp-opus]

a=sendrecv	[RFC3264] - Bob can send and recv audio
a=rtp-mux	[RFC5761] - Bob can perform RTP/RTCP Muxing on port 49203
a=candidate:0 1 UDP 2113667327 192.168.1.7 49203 typ host	[RFC5245] - Host ICE Candidate for Opus Stream
a=ccandidate:1 1 UDP 1694302207 98.248.92.77 49203 typ srflx raddr 192.168.1.7 rport 49203	[RFC5245] - Server Reflexive ICE Candidate for the above host candidate
a=candidate:candidate:0 2 UDP 2113667326 192.168.1.7 60065 typ host	[RFC5245] - Second Host Candidate
a=candidate:1 2 UDP 1694302206 98.248.92.77 60065 typ srflx raddr 192.168.1.7 rport 60065	[RFC5245] - Server Reflexive Candidate for the Second Host Candidate
m=video 63130 RTP/SAVPF 99	[RFC4566]
c= IN IP4 98.248.92.771	[RFC4566]
a=rtpmap:99 H264/90000	[RFC3984]
a=fmtp:99 profile-level-id=4d0028;packetization-mode=1	[RFC3984]
a=sendrecv	[RFC3264] - Bob can send and recv video
a=rtp-mux	[RFC5761] - Bob can perform RTP/RTCP Muxing on port 63130
a=candidate:0 1 UDP 2113667327 192.168.1.7 63130 typ host	[RFC5245]
a=candidate:1 1 UDP 1694302207 98.248.92.77 63130 typ srflx raddr 192.168.1.7 rport 63130	[RFC5245]
a=candidate:0 2 UDP 2113667326 192.168.1.7 56607 typ host	[RFC5245]
a=candidate:1 2 UDP 1694302206 98.248.92.77 56607 typ srflx raddr 192.168.1.7 rport 56607	[RFC5245]
a=rtp-fb:99 nack pli	[RFC5104] - Indicates support for Picture loss Indication and NACK
a=rtp-fb:99 ccm fir	[RFC5104] - Full Intra Frame Request-Codec Control Message support
m=application 55700 DTLS/SCTP 5000	[draft-ietf-mmusic-sctp-sdp]
c= IN IP4 98.248.92.771	[RFC4566]
a=sctpmap:5000 webrtc-Datachannel 1	[draft-ietf-mmusic-sctp-sdp]
a=webrtc-Datachannel:5000 stream=1;label="channel 1";subprotocol="chat";	[draft-ietf-mmusic-sctp-sdp]
a=sendrecv	[RFC3264] - Bob can send and recv non-media data
a=rtp-mux	[RFC5761] - Bob can perform RTP/RTCP Muxing on port 55700
a=candidate:0 1 UDP 2113667327 192.168.1.7 55700 typ host	[RFC5245] - Refer 4.1 SDP Offer
a=candidate:1 1 UDP 1694302207 98.248.92.77 55700 typ srflx raddr 192.168.1.7 rport 55700	[RFC5245] Refer 4.1 SDP Offer
a=candidate:0 2 UDP 2113667326 192.168.1.7 58137 typ host	[RFC5245] Refer 4.1 SDP Offer
a=candidate:1 2 UDP 1694302206 98.248.92.77 58137 typ srflx raddr 192.168.1.7 rport 581371	[RFC5245] Refer 4.1 SDP Offer
a=rtp-fb:5000 nack	[RFC5104] - Indicates NACK feedback support for the data-channel


Table 2: 5.1 SDP Answer

5.2. Secure Two-way Audio,Video,Data and remove data stream

TOC

This scenario builds upon from the usecase in the section 5.1 It extends by Alice removing data-stream once the session is in progress.

WebRTC Session (Audio,Video,Datachannel) - Drop Datachannel

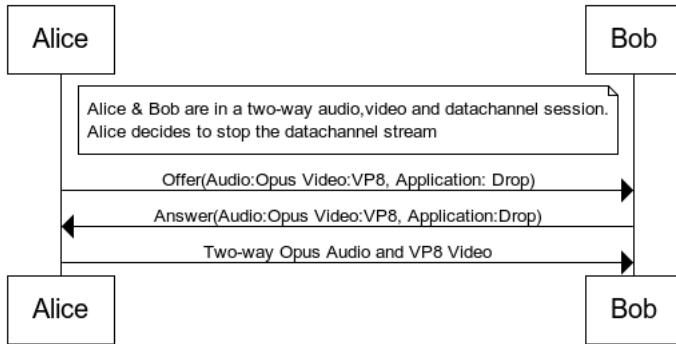

As a precondition, A Two-Way Audio,Video and Data Session is already setup.

SDP Contents	RFC#/Notes
v=0	[RFC4566]
o=alice 20519 0 IN IP4 0.0.0.0	[RFC4566]
s=	[RFC4566]
t=0 0	[RFC4566]
a=ice-ufrag:074c6550	[RFC5245]
a=ice-pwd:a28a397a4c3f31747d1ee3474af08a068	[RFC5245]
a=fingerprint:sha-1	[RFC5245]
99:41:49:83:4a:97:0e:1f:ef:6d:f7:c9:c7:70:9d:1f:66:79:a8:07	[RFC5506]
a=rtpcp-rsize	[RFC4566]
m=audio 54609 RTP/SAVPF 0 109 98	[RFC4566]
c= IN IP4 24.23.204.141	[RFC4566]
a=rtpmap:0 PCMU/8000	[RFC3551]
a=rtpmap:109 opus/48000	[draft-spittka-payload-rtp-opus]
a=ptime:20	[draft-spittka-payload-rtp-opus]
a=rtpmap:98 iLBC/8000 a=fmtp:98 mode=20	[RFC3952]
a=sendrecv	[RFC3264]
a=rtpcp-mux	[RFC5761]
a=candidate:0 1 UDP 2113667327 192.168.1.4 54609 typ host	[RFC5245]
a=candidate:1 1 UDP 694302207 24.23.204.141 54609 typ srflx raddr 192.168.1.4 rport 54609	[RFC5245]
a=candidate:0 2 UDP 2113667326 192.168.1.4 64678 typ host	[RFC5245]
a=candidate:1 2 UDP 1694302206 24.23.204.141 64678 typ srflx raddr 192.168.1.4 rport 64678	[RFC5245]
a=rtpcp-fb:109 nack	[RFC5104]
m=video 62537 RTP/SAVPF 99 120	[RFC4566]
c= IN IP4 24.23.204.141	[RFC4566]
a=rtpmap:99 H264/90000	[RFC3984]
a=fmtp:99 profile-level-id=4d0028;packetization-mode=1	[RFC3984]
a=rtpmap:120 VP8/90000	[draft-ietf-payload-vp8]
a=sendrecv	[RFC3264]
a=rtpcp-mux	[RFC5761]
a=candidate:0 1 UDP 2113667327 192.168.1.4 62537 typ host	[RFC5245]
a=candidate:1 1 UDP 1694302207 24.23.204.141 62537 typ srflx raddr 192.168.1.4 rport 62537	[RFC5245]
a=candidate:0 2 2113667326 192.168.1.4 54721 typ host	[RFC5245]
a=candidate:1 2 UDP 1694302206 24.23.204.141 54721 typ srflx raddr 192.168.1.4 rport 54721	[RFC5245]
a=rtpcp-fb:99 nack pli	[RFC5104]
a=rtpcp-fb:99 ccm fir	[RFC5104]
a=rtpcp-fb:120 nack pli	[RFC5104]

a=rtp-fb:120 ccm fir	[RFC5104]
m=application 0 DTLS/SCTP 5000	[draft-ietf-mmusic-sctp-sdp] - Port 0 indicates dropping data stream
c= IN IP4 24.23.204.141	[RFC4566]
a=sctmap:5000 webrtc-Datachannel 1	[draft-ietf-mmusic-sctp-sdp]
a=webrtc-Datachannel:5000 stream=1;label="channel 1";subprotocol="chat";	[draft-ietf-mmusic-sctp-sdp]
a=sendrecv	[RFC3264]
a=rtp-mux	[RFC5761]
a=candidate:0 1 UDP 2113667327 192.168.1.7 56966 typ host	[RFC5245]
a=candidate:1 1 UDP 1694302207 24.23.204.141 56966 typ srflx raddr 192.168.1.7 rport 56966	[RFC5245]
a=candidate:0 2 UDP 2113667326 192.168.1.7 51641 typ host	[RFC5245]
a=candidate:1 2 UDP 1694302206 24.23.204.141 51641 typ srflx raddr 192.168.1.7 rport 51641	[RFC5245]
a=rtp-fb:5000 nack	[RFC5104]

Table 3: 5..2 SDP Updated Offer w/DataChannel Drop

SDP Contents	RFC#/Notes
v=0	[RFC4566]
o=bob 16833 0 IN IP4 0.0.0.0	[RFC4566]
s=	[RFC4566]
t=0 0	[RFC4566]
a=ice-ufrag:c300d85b	[RFC5245]
a=ice-pwd:de4e99bd291c325921d5d47efbabd9a2	[RFC5245]
a=fingerprint:sha-1 99:41:49:83:4a:97:0e:1f:ef:6d:f7:c9:c7:70:9d:1f:66:79:a8:07	[RFC5245]
a=rtp-fb:120 ccm fir	[RFC5761]
m=application 0 DTLS/SCTP 5000	[draft-ietf-mmusic-sctp-sdp] - Port 0 indicates dropping data stream
c= IN IP4 24.23.204.141	[RFC4566]
a=sctmap:5000 webrtc-Datachannel 1	[draft-ietf-mmusic-sctp-sdp]
a=webrtc-Datachannel:5000 stream=1;label="channel 1";subprotocol="chat";	[draft-ietf-mmusic-sctp-sdp]
a=sendrecv	[RFC3264]
a=rtp-mux	[RFC5761]
a=candidate:0 1 UDP 2113667327 192.168.1.7 49203 typ host	[RFC5245]
a=ccandidate:1 1 UDP 1694302207 98.248.92.77 49203 typ srflx raddr 192.168.1.7 rport 49203	[RFC5245]
a=candidate:candidate:0 2 UDP 2113667326 192.168.1.7 60065 typ host	[RFC5245]
a=candidate:1 2 UDP 1694302206 98.248.92.77 60065 typ srflx raddr 192.168.1.7 rport 60065	[RFC5245]
m=video 63130 RTP/SAVPF 99 120	[RFC4566]
c= IN IP4 98.248.92.771	[RFC4566]
a=rtpmap:99 H264/90000	[RFC3984]
a=fmtp:99 profile-level-id=4d0028;packetization-mode=1	[RFC3984]
a=rtpmap:120 VP8/90000	[draft-ietf-payload-vp8]
a=sendrecv	[RFC3264]
a=rtp-mux	[RFC5761]
a=candidate:0 1 UDP 2113667327 192.168.1.7 63130 typ host	[RFC5245]
a=ccandidate:1 1 UDP 1694302207 98.248.92.77 63130 typ srflx raddr 192.168.1.7 rport 63130	[RFC5245]
a=candidate:0 2 UDP 2113667326 192.168.1.7 56607 typ host	[RFC5245]
a=candidate:1 2 UDP 1694302206 98.248.92.77 56607 typ srflx raddr 192.168.1.7 rport 56607	[RFC5245]
a=rtp-fb:99 nack pli	[RFC5104]
a=rtp-fb:99 ccm fir	[RFC5104]
m=application 0 DTLS/SCTP 5000	[draft-ietf-mmusic-sctp-sdp] Bob accepts dropping the data stream
c= IN IP4 98.248.92.771	[RFC4566]
a=sctmap:5000 webrtc-Datachannel 1	[draft-ietf-mmusic-sctp-sdp]
a=webrtc-Datachannel:5000 stream=1;label="channel 1";subprotocol="chat";	[draft-ietf-mmusic-sctp-sdp]

1";subprotocol="chat";	[draft-ietf-mmmusic-sctp-sdp]
a=sendrecv	[RFC3264]
a=rtp-mux	[RFC5761]
a=candidate:0 1 UDP 2113667327 192.168.1.7 55700 typ host	[RFC5245]
a=candidate:1 1 UDP 694302207 24.23.204.141 54609 typ srflx raddr 192.168.1.4 rport 54609	[RFC5245]
a=candidate:0 2 UDP 2113667326 192.168.1.7 58137 typ host	[RFC5245]
a=candidate:1 2 UDP 694302206 98.248.92.77 58137 typ srflx raddr 192.168.1.7 rport 581371	[RFC5245]
a=rtp-fb:5000 nack	[RFC5104]


Table 4: 5..2 SDP Updated Answer

5.3. Secure Two-Way Audio,Video w/BUNDLE Support Unknown

TOC

This use-case demonstrates a successfull audio and video multiplexing scenario with SDP BUNDLE negotiation when the Alice is unsure of the Bob's BUNDLE support. Table below also illustrates, additional SDP Offer/Answer exchange once the Alice figures that a 2-way BUNDLE session can be setup.

WebRTC Session - 2-Way Secure Audio,Video with BUNDLE

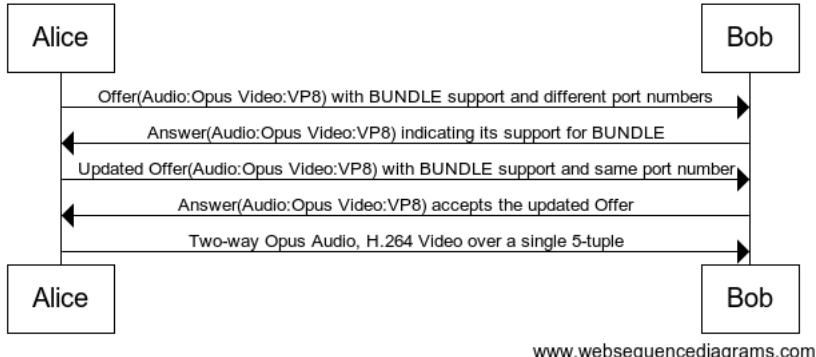

SDP Contents	RFC#/Notes
v=0	[RFC4566]
o=alice 20518 0 IN IP4 0.0.0.0	[RFC4566]
s=	[RFC4566]
t=0 0	[RFC4566]
a=ice-ufrag:074c6550	[RFC5245]
a=ice-pwd:a28a397a4c3f31747d1ee3474af08a068	[RFC5245]
a=fingerprint:sha-1 99:41:49:83:4a:97:0e:1f:ef:6d:f7:c9:c7:70:9d:1f:66:79:a8:07	[RFC5245] [RFC5506]
a=rtpcp-rsize	[RFC5506]
a=group:BUNDLE foo bar	[draft-ietf-mmmusic-sdp-bundle-negotiation] Alice supports grouping of m-lines
m=audio 54609 RTP/SAVPF 109	[RFC4566]
a=mid:foo	[RFC5888] Audio m-line part of BUNDLE group with a unique port number
c= IN IP4 24.23.204.141	[RFC4566]
b=AS:200	[RFC4566]
a=rtpmap:109 opus/48000	[draft-spittka-payload-rtp-opus]
a=ptime:20	[draft-spittka-payload-rtp-opus]
a=sendrecv	[RFC3264]
a=rtp-mux	[RFC5761]
a=candidate:0 1 UDP 2113667327 192.168.1.4 54609 typ host	[RFC5245]
a=candidate:1 1 UDP 694302207 24.23.204.141 54609 typ srflx raddr 192.168.1.4 rport 54609	[RFC5245]
a=candidate:0 2 UDP 2113667326 192.168.1.4 64678 typ host	[RFC5245]

a=candidate:1 2 UDP 1694302206 24.23.204.141 64678 typ srflx	[RFC5245]
raddr 192.168.1.4 rport 64678	
a=rtcp-fb:109 nack	[RFC5104]
m=video 62537 RTP/SAVPF 120	[RFC4566]
a=mid:bar	[RFC5888] Video m=line part of the Bundle group with a unique port number
c= IN IP4 24.23.204.141	[RFC4566]
b=AS:1000	[RFC4566]
a=rtpmap:120 VP8/90000	[draft-ietf-payload-vp8]
a=sendrecv	[RFC3264]
a=rtcp-mux	[RFC5761]
a=candidate:0 1 UDP 2113667327 192.168.1.4 62537 typ host	[RFC5245]
a=candidate:1 1 UDP 1694302207 24.23.204.141 62537 typ srflx	[RFC5245]
raddr 192.168.1.4 rport 62537	
a=candidate:0 2 2113667326 192.168.1.4 54721 typ host	[RFC5245]
a=candidate:1 2 UDP 1694302206 24.23.204.141 54721 typ srflx	[RFC5245]
raddr 192.168.1.4 rport 54721	
a=rtcp-fb:120 nack pli	[RFC5104]
a=rtcp-fb:120 ccm fir	[RFC5104]

Table 5: 5.3 SDP Offer w/BUNDLE

SDP Contents	RFC#/Notes
v=0	[RFC4566]
o=bob 16833 0 IN IP4 0.0.0.0	[RFC4566]
s=	[RFC4566]
t=0 0	[RFC4566]
a=ice-ufrag:c300d85b	[RFC5245]
a=ice-pwd:de4e99bd291c325921d5d47efbabd9a2	[RFC5245]
a=fingerprint:sha-1	[RFC5245]
99:41:49:83:4a:97:0e:1f:ef:6d:f7:c9:c7:70:9d:1f:66:79:a8:07	
a=rtcp-rsize	[RFC5506]
a=group:BUNDLE foo bar	[draft-ietf-mmusic-sdp-bundle-negotiation] Bob supports grouping of m-lines and indicates his interest in the same as well
m=audio 49203 RTP/SAVPF 109	[RFC4566]
a=mid:foo	[RFC5888] Audio m=line part of the BUNDLE group
c= IN IP4 98.248.92.77	[RFC4566]
b=AS:200	[RFC4566]
a=rtpmap:109 opus/48000	[draft-spittka-payload-rtp-opus]
a=ptime:20	[draft-spittka-payload-rtp-opus]
a=sendrecv	[RFC3264]
a=rtcp-mux	[RFC5761]
a=candidate:0 1 UDP 2113667327 192.168.1.7 49203 typ host	[RFC5245]
a=candidate:1 1 UDP 1694302207 98.248.92.77 49203 typ	[RFC5245]
srflx raddr 192.168.1.7 rport 49203	
a=candidate:candidate:0 2 UDP 2113667326 192.168.1.7 60065 typ host	[RFC5245]
a=candidate:1 2 UDP 1694302206 98.248.92.77 60065 typ	[RFC5245]
srflx raddr 192.168.1.7 rport 60065	
m=video 49203 RTP/SAVPF 120	[RFC4566]
a=mid:bar	[RFC5888] Video m=line part of the BUNDLE group with the port from audio line repeated
b=AS:1000	[RFC4566]
c= IN IP4 98.248.92.77	[RFC4566]
a=rtpmap:120 VP8/90000	[draft-ietf-payload-vp8]
a=sendrecv	[RFC3264]
a=rtcp-mux	[RFC5761]
a=candidate:0 1 UDP 2113667327 192.168.1.7 49203 typ host	[RFC5245]
a=candidate:1 1 UDP 1694302207 98.248.92.77 49203 typ	[RFC5245]
srflx raddr 192.168.1.7 rport 49203	
a=candidate:0 2 UDP 2113667326 192.168.1.7 56607 typ host	[RFC5245]
a=candidate:1 2 UDP 1694302206 98.248.92.77 56607 typ	

srflx raddr 192.168.1.7 rport 56607

[RFC5245]

Table 6: 5.3 SDP Answer w/BUNDLE

SDP Contents	RFC#/Notes
v=0	[RFC4566]
o=alice 20518 0 IN IP4 0.0.0.0	[RFC4566]
s=	[RFC4566]
t=0 0	[RFC4566]
a=ice-ufrag:074c6550	[RFC5245]
a=ice-pwd:a28a397a4c3f31747d1ee3474af08a068	[RFC5245]
a=fingerprint:sha-1	[RFC5245]
99:41:49:83:4a:97:0e:1f:ef:6d:f7:c9:c7:70:9d:1f:66:79:a8:07	
a=rtpmap:96 opus/48000	[RFC5506]
a=rtpmap:97 opus/48000	[RFC5506]
a=rtpmap:98 opus/48000	[RFC5506]
a=rtpmap:99 opus/48000	[RFC5506]
a=rtpmap:100 opus/48000	[RFC5506]
a=rtpmap:101 opus/48000	[RFC5506]
a=rtpmap:102 opus/48000	[RFC5506]
a=rtpmap:103 opus/48000	[RFC5506]
a=rtpmap:104 opus/48000	[RFC5506]
a=rtpmap:105 opus/48000	[RFC5506]
a=rtpmap:106 opus/48000	[RFC5506]
a=rtpmap:107 opus/48000	[RFC5506]
a=rtpmap:108 opus/48000	[RFC5506]
a=rtpmap:109 opus/48000	[RFC5506]
a=rtpmap:110 opus/48000	[RFC5506]
a=rtpmap:111 opus/48000	[RFC5506]
a=rtpmap:112 opus/48000	[RFC5506]
a=rtpmap:113 opus/48000	[RFC5506]
a=rtpmap:114 opus/48000	[RFC5506]
a=rtpmap:115 opus/48000	[RFC5506]
a=rtpmap:116 opus/48000	[RFC5506]
a=rtpmap:117 opus/48000	[RFC5506]
a=rtpmap:118 opus/48000	[RFC5506]
a=rtpmap:119 opus/48000	[RFC5506]
a=rtpmap:120 VP8/90000	[RFC5506]
a=rtpmap:121 VP9/90000	[RFC5506]
a=rtpmap:122 H264/90000	[RFC5506]
a=rtpmap:123 H265/90000	[RFC5506]
a=rtpmap:124 AMR/40000	[RFC5506]
a=rtpmap:125 AMR-WB/40000	[RFC5506]
a=rtpmap:126 G722/40000	[RFC5506]
a=rtpmap:127 G726/40000	[RFC5506]
a=rtpmap:128 G729/40000	[RFC5506]
a=rtpmap:129 G723/1/40000	[RFC5506]
a=rtpmap:130 G723/1/20000	[RFC5506]
a=rtpmap:131 G729/1/40000	[RFC5506]
a=rtpmap:132 G729/1/20000	[RFC5506]
a=rtpmap:133 G729/1/10000	[RFC5506]
a=rtpmap:134 G729/1/5000	[RFC5506]
a=rtpmap:135 G729/1/2500	[RFC5506]
a=rtpmap:136 G729/1/1250	[RFC5506]
a=rtpmap:137 G729/1/625	[RFC5506]
a=rtpmap:138 G729/1/312	[RFC5506]
a=rtpmap:139 G729/1/156	[RFC5506]
a=rtpmap:140 G729/1/78	[RFC5506]
a=rtpmap:141 G729/1/39	[RFC5506]
a=rtpmap:142 G729/1/20	[RFC5506]
a=rtpmap:143 G729/1/10	[RFC5506]
a=rtpmap:144 G729/1/5	[RFC5506]
a=rtpmap:145 G729/1/2	[RFC5506]
a=rtpmap:146 G729/1/1	[RFC5506]
a=rtpmap:147 G729/1/0.5	[RFC5506]
a=rtpmap:148 G729/1/0.25	[RFC5506]
a=rtpmap:149 G729/1/0.125	[RFC5506]
a=rtpmap:150 G729/1/0.0625	[RFC5506]
a=rtpmap:151 G729/1/0.03125	[RFC5506]
a=rtpmap:152 G729/1/0.0156	[RFC5506]
a=rtpmap:153 G729/1/0.0078	[RFC5506]
a=rtpmap:154 G729/1/0.0039	[RFC5506]
a=rtpmap:155 G729/1/0.0019	[RFC5506]
a=rtpmap:156 G729/1/0.00095	[RFC5506]
a=rtpmap:157 G729/1/0.000475	[RFC5506]
a=rtpmap:158 G729/1/0.0002375	[RFC5506]
a=rtpmap:159 G729/1/0.00011875	[RFC5506]
a=rtpmap:160 G729/1/0.000059375	[RFC5506]
a=rtpmap:161 G729/1/0.0000296875	[RFC5506]
a=rtpmap:162 G729/1/0.00001484375	[RFC5506]
a=rtpmap:163 G729/1/0.000007421875	[RFC5506]
a=rtpmap:164 G729/1/0.0000037109375	[RFC5506]
a=rtpmap:165 G729/1/0.00000185546875	[RFC5506]
a=rtpmap:166 G729/1/0.000000927734375	[RFC5506]
a=rtpmap:167 G729/1/0.0000004638671875	[RFC5506]
a=rtpmap:168 G729/1/0.00000023193359375	[RFC5506]
a=rtpmap:169 G729/1/0.000000115966796875	[RFC5506]
a=rtpmap:170 G729/1/0.000000579833984375	[RFC5506]
a=rtpmap:171 G729/1/0.0000002899169921875	[RFC5506]
a=rtpmap:172 G729/1/0.00000014495849609375	[RFC5506]
a=rtpmap:173 G729/1/0.000000072479248048828125	[RFC5506]
a=rtpmap:174 G729/1/0.0000000362396240244140625	[RFC5506]
a=rtpmap:175 G729/1/0.00000001811981201220703125	[RFC5506]
a=rtpmap:176 G729/1/0.000000009059906006103515625	[RFC5506]
a=rtpmap:177 G729/1/0.0000000045299530030517578125	[RFC5506]
a=rtpmap:178 G729/1/0.00000000226497650152587890625	[RFC5506]
a=rtpmap:179 G729/1/0.000000001132488250762939453125	[RFC5506]
a=rtpmap:180 G729/1/0.00000000056624412538146972734375	[RFC5506]
a=rtpmap:181 G729/1/0.00000000028312206269073486368125	[RFC5506]
a=rtpmap:182 G729/1/0.0000000001415610313453679318453125	[RFC5506]
a=rtpmap:183 G729/1/0.00000000007078051567278396922265625	[RFC5506]
a=rtpmap:184 G729/1/0.0000000000353902578363919846113125	[RFC5506]
a=rtpmap:185 G729/1/0.0000000000176951289181959923065625	[RFC5506]
a=rtpmap:186 G729/1/0.00000000000884756445909799615328125	[RFC5506]
a=rtpmap:187 G729/1/0.0000000000044237822295489980766453125	[RFC5506]
a=rtpmap:188 G729/1/0.00000000000221189111477449903832265625	[RFC5506]
a=rtpmap:189 G729/1/0.0000000000011059455573872495191613125	[RFC5506]
a=rtpmap:190 G729/1/0.00000000000055297277869362475958065625	[RFC5506]
a=rtpmap:191 G729/1/0.0000000000002764863893468123797903125	[RFC5506]
a=rtpmap:192 G729/1/0.00000000000013824319467340618989515625	[RFC5506]
a=rtpmap:193 G729/1/0.00000000000006912159733670309494753125	[RFC5506]
a=rtpmap:194 G729/1/0.00000000000003456079866835154747375625	[RFC5506]
a=rtpmap:195 G729/1/0.00000000000001728039933417577373688125	[RFC5506]
a=rtpmap:196 G729/1/0.0000000000000086401996670878868684453125	[RFC5506]
a=rtpmap:197 G729/1/0.00000000000000432009933354394343422265625	[RFC5506]
a=rtpmap:198 G729/1/0.000000000000002160049666772192171113125	[RFC5506]
a=rtpmap:199 G729/1/0.00000000000000108002483338510908555625	[RFC5506]
a=rtpmap:200 G729/1/0.000000000000000540012416692554542778125	[RFC5506]
a=rtpmap:201 G729/1/0.000000000000000270006208346277271390625	[RFC5506]
a=rtpmap:202 G729/1/0.000000000000000135003104173138635953125	[RFC5506]
a=rtpmap:203 G729/1/0.000000000000000067501552086569317975625	[RFC5506]
a=rtpmap:204 G729/1/0.0000000000000000337507760432846589878125	[RFC5506]
a=rtpmap:205 G729/1/0.00000000000000001687538802164232949390625	[RFC5506]
a=rtpmap:206 G729/1/0.000000000000000008437694010821164746953125	[RFC5506]
a=rtpmap:207 G729/1/0.000000000000000004218847005410582373475625	[RFC5506]
a=rtpmap:208 G729/1/0.000000000000000002109423502705291186738125	[RFC5506]
a=rtpmap:209 G729/1/0.0000000000000000010547117513526455933690625	[RFC5506]
a=rtpmap:210 G729/1/0.00000000000000000052735587567632279668453125	[RFC5506]
a=rtpmap:211 G729/1/0.00000000000000000026367793783816139834265625	[RFC5506]
a=rtpmap:212 G729/1/0.0000000000000000001318389689190806991713125	[RFC5506]
a=rtpmap:213 G729/1/0.000000000000000000065919484459540349585625	[RFC5506]
a=rtpmap:214 G729/1/0.0000000000000000000329597422237779797928125	[RFC5506]
a=rtpmap:215 G729/1/0.00000000000000000001647987111188898989453125	[RFC5506]
a=rtpmap:216 G729/1/0.000000000000000000008239935555944494947265625	[RFC5506]
a=rtpmap:217 G729/1/0.000000000000000000004119967777972247473638125	[RFC5506]
a=rtpmap:218 G729/1/0.000000000000000000002059983888986123736815625	[RFC5506]
a=rtpmap:219 G729/1/0.0000000000000000000010299919444930618518078125	[RFC5506]
a=rtpmap:220 G729/1/0.000000000000000000000514995972246530925039375	[RFC5506]
a=rtpmap:221 G729/1/0.0000000000000000000002574979861232654625196875	[RFC5506]
a=rtpmap:222 G729/1/0.00000000000000000000012874989306131273125390625	[RFC5506]
a=rtpmap:223 G729/1/0.0000000000000000000000643749465306563656251953125	[RFC5506]
a=rtpmap:224 G729/1/0.00000000000000000000003218747326532818281259765625	[RFC5506]
a=rtpmap:225 G729/1/0.0000000000000000000000160937366326640914531254828125	[RFC5506]
a=rtpmap:226 G729/1/0.00000000000000000000000804686831633204572656252415625	[RFC5506]
a=rtpmap:227 G729/1/0.000000000000000000000004023434158166022863812512078125	[RFC5506]
a=rtpmap:228 G729/1/0.000000000000000000000002011717079083301431531256035125	[RFC5506]
a=rtpmap:229 G729/1/0.0000000000000000000000010058585395416507157812530175625	[RFC5506]
a=rtpmap:230 G729/1/0.000000000000000000000000502929269772082537890625150878125	[RFC5506]
a=rtpmap:231 G729/1/0.00000000000000000000000025146463488604127394531257544375	[RFC5506]
a=rtpmap:232 G729/1/0.00000000000000000000000012573231744302063697265625377234375	[RFC5506]
a=rtpmap:233 G729/1/0.000000000000000000000000062866158722101018488125188615625	[RFC5506]
a=rtpmap:234 G729/1/0.00000000000000000000000003143307936105050924453125943078125	[RFC5506]
a=rtpmap:235 G729/1/0.00000000000000000000000001571653968052525472231254715390625	[RFC5506]
a=rtpmap:236 G729/1/0.00000000000000000000000000785826984026263736153125235778125	[RFC5506]
a=rtpmap:237 G729/1/0.00000000000000000000000000392913492013131868078125117890625	[RFC5506]
a=rtpmap:238 G729/1/0.00000000000000000000000000196456946006565939031255894734375	[RFC5506]
a=rtpmap:239 G729/1/0.000000000000000000000000000982284730032829545153125294738125	[RFC5506]
a=rtpmap:240 G729/1/0.000000000000000000000000000491142365016414775578125147368125	[RFC5506]
a=rtpmap:241 G729/1/0.00000000000000000000000000024557118250820738779312573684375	[RFC5506]
a=rtpmap:242 G729/1/0.00000000000000000000000000012278559125410369399531253684734375	[RFC5506]
a=rtpmap:243 G729/1/0.0000000000000000000000000000613927956270518499953125184238125	[RFC5506]
a=rtpmap:244 G729/1/0.00000000000000000000000000003069639781352592499953125921178125	[RFC5506]
a=rtpmap:245 G729/1/0.0000000000000000000000000000153481989067649624999531254605878125	[RFC5506]
a=rtpmap:246 G729/1/0.000000000000000000000000000007674099453383248149995312523028125	[RFC5506]
a=rtpmap:247 G729/1/0.0000000000000000000000000000038370497266916200749995312511514375	[RFC5506]
a=rtpmap:248 G729/1/0.00000000000000000000000000000191852486334531003749995312557578125	[RFC5506]
a=rtpmap:249 G729/1/0.0000000000000000000000000000009592624316726550187499953125287890625	[RFC5506]
a=rtpmap:250 G729/1/0.000000000000000000000000000000479631215836327509374999531251439375	[RFC5506]
a=rtpmap:251 G729/1/0.000000000000000000000000000000239815607918163754687499953125719734375	[RFC5506]
a=rtpmap:252 G729/1/0.0000000000000000000000000000001199078039590818723437549995312535984375	[RFC5506]
a=rtpmap:253 G729/1/0.0000000000000000000000000000000599539019795409361781254999531251799375	[RFC5506]
a=rtpmap:254 G729/1/0.00000000000000000000000000000002997695098977046808749995312589968125	[RFC5506]
a=rtpmap:255 G729/1/0.0000000000000000000000000000000149884754948852340437549995312544984375	[RFC5506]
a=rtpmap:256 G729/1/0.0000000000000000000000000000000074942377474426170218754999531252249375	[RFC5506]
a=rtpmap:257 G729/1/0.00000000000000000000000000000000374711887372130851093754999531251124734375	[RFC5506]
a=rtpmap:258 G729/1/0.00000000000000000000000000000000187355943686065425537549995312556228125	[RFC5506]
a=rtpmap:259 G729/1/0.000000000000000000000000000000000936779718430327227812549995312528114375	[RFC5506]
a=rtpmap:260 G729/1/0.00000000000000000000000000000000046838985921516361393754999531251405734375	[RFC5506]
a=rtpmap:261 G729/1/0.000000000000000000000000000000000234194929607581859687549995312570284375	[RFC5506]
a=rtpmap:262 G729/1/0.000000000000000000000000000000000117097464803790929843754999531253514375	[RFC5506]
a=rtpmap:263 G729/1/0.000000000000000000000000000000000058548732401895049484375499953125175734375	[RFC5506]
a=rtpmap:264 G729/1/0.0000000000000000000000000000000000292743662009475247437549995312587890625	[RFC5

a=rtp-rsize	[RFC5506]
a=group:BUNDLE foo bar	[draft-ietf-mmusic-sdp-bundle-negotiation] Bob supports grouping of m= lines and indicates his interest in the same as well
m=audio 49203 RTP/SAVPF 109	[RFC4566]
a=mid:foo	[RFC5888] Audio m=line part of the BUNDLE group
c=IN IP4 98.248.92.77	[RFC4566]
b=AS:200	[RFC4566]
a=rtpmap:109 opus/48000	[draft-spittka-payload-rtp-opus]
a=ptime:20	[draft-spittka-payload-rtp-opus]
a=sendrecv	[RFC3264]
a=rtcp-mux	[RFC5761]
a=candidate:0 1 UDP 2113667327 192.168.1.7 49203 typ host	[RFC5245]
a=candidate:1 1 UDP 1694302207 98.248.92.77 49203 typ srflx raddr 192.168.1.7 rport 49203	[RFC5245]
a=candidate:candidate:0 2 UDP 2113667326 192.168.1.7 60065 typ host	[RFC5245]
a=candidate:1 2 UDP 1694302206 98.248.92.77 60065 typ srflx raddr 192.168.1.7 rport 60065	[RFC5245]
m=video 49203 RTP/SAVPF 120	[RFC4566]
[RFC4566]	
c= IN IP4 98.248.92.771	[RFC5888] Video m=line part of the BUNDLE group with the port from audio line repeated
b=AS:1000	[RFC4566]
a=rtpmap:120 VP8/90000	[draft-ietf-payload-vp8]
a=sendrecv	[RFC3264]
a=rtcp-mux	[RFC5761]
a=candidate:0 1 UDP 2113667327 192.168.1.7 49203 typ host	[RFC5245]
a=candidate:1 1 UDP 1694302207 98.248.92.77 49203 typ srflx raddr 192.168.1.7 rport 49203	[RFC5245]
a=candidate:0 2 UDP 2113667326 192.168.1.7 56607 typ host	[RFC5245]
a=candidate:1 2 UDP 1694302206 98.248.92.77 56607 typ srflx raddr 192.168.1.7 rport 56607	[RFC5245]


Table 8: 5.3 SDP Answer w/BUNDLE for updated Offer

5.4. Secure Two-Way Audio,Video w/BUNDLE Support Known

TOC

This use-case demonstrates a successfull audio and video multiplexing scenario with SDP BUNDLE negotiation Alice (Offerer) knows about Bob's (Answerer) BUNDLE support.

WebRTC Session - 2-Way Secure Audio,Video with BUNDLE Support Known

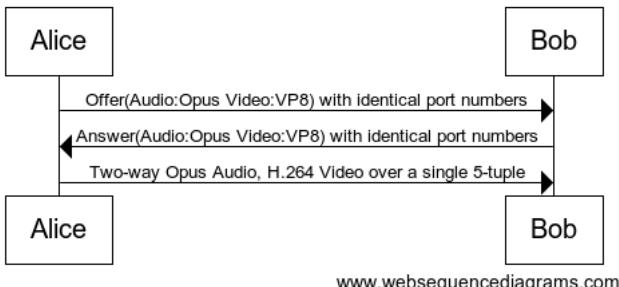

www.websequencediagrams.com

SDP Contents	RFC#/Notes
v=0	[RFC4566]
o=alice 20518 0 IN IP4 0.0.0.0	[RFC4566]
s=	[RFC4566]
t=0 0	[RFC4566]
a=ice-ufrag:074c6550	[RFC5245]

a=ice-pwd:a28a397a4c3f31747d1ee3474af08a068	[RFC5245]
a=fingerprint:sha-1 99:41:49:83:4a:97:0e:1f:ef:6d:f7:c9:c7:70:9d:1f:66:79:a8:07	[RFC5245]
a=rtp-rsize	[RFC5506]
a=group:bundle foo bar	[draft-ietf-mmusic-sdp-bundle-negotiation] Alice supports grouping of m-lines
m=audio 10000 RTP/SAVPF 109	[RFC4566]
a=mid:foo	[RFC5888] Audio m-line part of BUNDLE group with a unique port number
c= IN IP4 24.23.204.141	[RFC4566]
b=AS:200	[RFC4566]
a=rtpmap:109 opus/48000	[draft-spittka-payload-rtp-opus]
a=ptime:20	[draft-spittka-payload-rtp-opus]
a=sendrecv	[RFC3264]
a=rtp-mux	[RFC5761]
a=candidate:0 1 UDP 2113667327 192.168.1.4 10000 typ host	[RFC5245]
a=candidate:1 1 UDP 694302207 24.23.204.141 10000 typ srflx raddr 192.168.1.4 rport 10000	[RFC5245]
a=candidate:0 2 UDP 2113667326 192.168.1.4 64678 typ host	[RFC5245]
a=candidate:1 2 UDP 1694302206 24.23.204.141 64678 typ srflx raddr 192.168.1.4 rport 64678	[RFC5245]
a=rtp-fb:109 nack	[RFC5104]
m=video 10000 RTP/SAVPF 120	[RFC4566]
a=mid:bar	[RFC5888] Video m-line part of the BUNDLE group with audio port repeated
c= IN IP4 24.23.204.141	[RFC4566]
b=AS:1000	[RFC4566]
a=rtpmap:120 VP8/90000	[draft-ietf-payload-vp8]
a=sendrecv	[RFC3264]
a=rtp-mux	[RFC5761]
a=candidate:0 1 UDP 2113667327 192.168.1.4 10000 typ host	[RFC5245]
a=candidate:1 1 UDP 1694302207 24.23.204.141 10000 typ srflx raddr 192.168.1.4 rport 10000	[RFC5245]
a=candidate:0 2 2113667326 192.168.1.4 54721 typ host	[RFC5245]
a=candidate:1 2 UDP 1694302206 24.23.204.141 54721 typ srflx raddr 192.168.1.4 rport 54721	[RFC5245]
a=rtp-fb:120 nack pli	[RFC5104]
a=rtp-fb:120 ccm fir	[RFC5104]

Table 9: 5.4 SDP Offer w/BUNDLE

SDP Contents	RFC#/Notes
v=0	[RFC4566]
o=bob 16833 0 IN IP4 0.0.0.0	[RFC4566]
s=	[RFC4566]
t=0 0	[RFC4566]
a=ice-ufrag:c300d85b	[RFC5245]
a=ice-pwd:de4e99bd291c325921d5d47efbabd9a2	[RFC5245]
a=fingerprint:sha-1 99:41:49:83:4a:97:0e:1f:ef:6d:f7:c9:c7:70:9d:1f:66:79:a8:07	[RFC5245]
a=rtp-rsize	[RFC5506]
a=group:bundle foo bar	[draft-ietf-mmusic-sdp-bundle-negotiation] Bob supports grouping of m-lines and indicates his interest in the same as well
m=audio 20000 RTP/SAVPF 109	[RFC4566]
a=mid:foo	[RFC5888] Audio m-line part of the BUNDLE group
b=AS:200	[RFC4566]
c= IN IP4 98.248.92.77	[RFC4566]
a=rtpmap:109 opus/48000	[draft-spittka-payload-rtp-opus]
a=ptime:20	[draft-spittka-payload-rtp-opus]
a=sendrecv	[RFC3264]
a=rtp-mux	[RFC5761]

a=candidate:0 1 UDP 2113667327 192.168.1.7 20000 typ host [RFC5245]
a=candidate:1 1 UDP 1694302207 98.248.92.77 20000 typ srflx raddr 192.168.1.7 rport 20000 [RFC5245]
a=candidate:candidate:0 2 UDP 2113667326 192.168.1.7 60065 typ host [RFC5245]
a=candidate:1 2 UDP 1694302206 98.248.92.77 60065 typ srflx raddr 192.168.1.7 rport 60065 [RFC5245]
m=video 20000 RTP/SAVPF 120
[RFC5888] Video m=line part of the BUNDLE group with the port from audio line repeated
[RFC4566] a=mid:bar
[RFC4566] b=AS:200
[draft-ietf-payload-vp8] c= IN IP4 98.248.92.77
[RFC3264] a=rtpmap:120 VP8/90000
[RFC5761] a=sendrecv
[RFC5245] a=rtp-mux
a=candidate:0 1 UDP 2113667327 192.168.1.7 20000 typ host
a=candidate:1 1 UDP 1694302207 98.248.92.77 20000 typ srflx raddr 192.168.1.7 rport 20000
[RFC5245] a=candidate:0 2 UDP 2113667326 192.168.1.7 56607 typ host
[RFC5245] a=candidate:1 2 UDP 1694302206 98.248.92.77 56607 typ srflx raddr 192.168.1.7 rport 56607 [RFC5245]

[RFC5245]


Table 10: 5..4 SDP Answer w/BUNDLE

5.5. Secure Two-Way Audio,Video w/BUNDLE Unsupported

TOC

This use-case illustrates SDP Offer/Answer exchange when the far-end (Bob) either doesn't support media bundling or does not want to group m-lines over a single 5-tuple.

WebRTC Session - 2-Way Secure Audio,Video with BUNDLE Unsupported

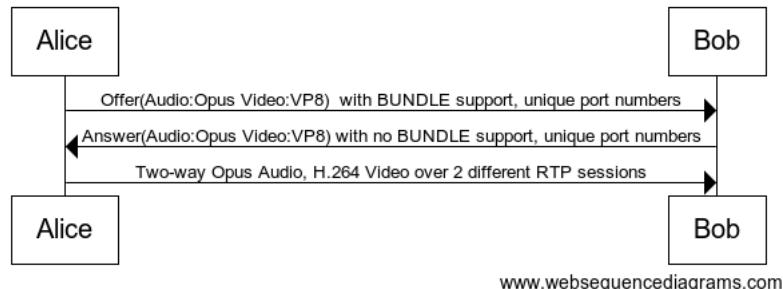

www.websequencediagrams.com

SDP Contents	RFC#/Notes
v=0	[RFC4566]
o=alice 20518 0 IN IP4 0.0.0.0	[RFC4566]
s=	[RFC4566]
t=0 0	[RFC4566]
a=ice-ufrag:074c6550	[RFC5245]
a=ice-pwd:a28a397a4c3f31747d1ee3474af08a068	[RFC5245]
a=fingerprint:sha-1 99:41:49:83:4a:97:0e:1f:ef:6d:f7:c9:c7:70:9d:1f:66:79:a8:07	[RFC5245]
a=rtp-rsize	[RFC5506]
a=group:BUNDLE foo bar	[draft-ietf-mmusic-sdp-bundle-negotiation] Alice supports grouping of m=lines
m=audio 55232 RTP/SAVPF 109	[RFC4566]
a=mid:foo	[RFC5888] Audio m=line part of BUNDLE group with a unique port number
c= IN IP4 24.23.204.141	[RFC4566]
b=AS:200	[RFC4566]

a=rtpmap:109 opus/48000	[draft-spittka-payload-rtp-opus]
a=ptime:20	[draft-spittka-payload-rtp-opus]
a=sendrecv	[RFC3264]
a=rtp-mux	[RFC5761]
a=candidate:0 1 UDP 2113667327 192.168.1.4 55232 typ host	[RFC5245]
a=candidate:1 1 UDP 694302207 24.23.204.141 55232 typ srflx raddr 192.168.1.4 rport 55232	[RFC5245]
a=candidate:0 2 UDP 2113667326 192.168.1.4 64678 typ host	[RFC5245]
a=candidate:1 2 UDP 1694302206 24.23.204.141 64678 typ srflx raddr 192.168.1.4 rport 64678	[RFC5245]
a=rtp-fb:109 nack	[RFC5104]
m=video 54332 RTP/SAVPF 120	[RFC4566]
a=mid:bar	[RFC5888] Video m=line part of the BUNDLE group with a unique port number
c= IN IP4 24.23.204.141	[RFC4566]
b=AS:1000	[RFC4566]
a=rtpmap:120 VP8/90000	[draft-ietf-payload-vp8]
a=sendrecv	[RFC3264]
a=rtp-mux	[RFC5761]
a=candidate:0 1 UDP 2113667327 192.168.1.4 54332 typ host	[RFC5245]
a=candidate:1 1 UDP 1694302207 24.23.204.141 54332 typ srflx raddr 192.168.1.4 rport 54332	[RFC5245]
a=candidate:0 2 2113667326 192.168.1.4 54721 typ host	[RFC5245]
a=candidate:1 2 UDP 1694302206 24.23.204.141 54721 typ srflx raddr 192.168.1.4 rport 54721	[RFC5245]
a=rtp-fb:120 nack pli	[RFC5104]
a=rtp-fb:120 ccm fir	[RFC5104]

Table 11: 5.5 SDP Offer w/BUNDLE

SDP Contents	RFC#/Notes
v=0	[RFC4566]
o=bob 16833 0 IN IP4 0.0.0.0	[RFC4566]
s=	[RFC4566]
t=0 0	[RFC4566]
a=ice-ufrag:c300d85b	[RFC5245]
a=ice-pwd:de4e99bd291c325921d5d47efbabd9a2	[RFC5245]
a=fingerprint:sha-1	[RFC5245]
99:41:49:83:4a:97:0e:1f:ef:6d:f7:c9:c7:70:9d:1f:66:79:a8:07	[RFC5506]
a=rtp-rsize	[RFC4566]
m=audio 53214 RTP/SAVPF 109	[RFC4566]
b=AS:200	[RFC4566]
c= IN IP4 98.248.92.77	[RFC4566]
a=rtpmap:109 opus/48000	[draft-spittka-payload-rtp-opus]
a=ptime:20	[draft-spittka-payload-rtp-opus]
a=sendrecv	[RFC3264]
a=rtp-mux	[RFC5761]
a=candidate:0 1 UDP 2113667327 192.168.1.7 53214 typ host	[RFC5245]
a=candidate:1 1 UDP 1694302207 98.248.92.77 53214 typ srflx raddr 192.168.1.7 rport 53214	[RFC5245]
a=candidate:candidate:0 2 UDP 2113667326 192.168.1.7 60065 typ host	[RFC5245]
a=candidate:1 2 UDP 1694302206 98.248.92.77 60065 typ srflx raddr 192.168.1.7 rport 60065	[RFC5245]
m=video 58679 RTP/SAVPF 120	[RFC4566]
[RFC4566]	[RFC4566]
[draft-ietf-payload-vp8]	[RFC3264]
[RFC5761]	[RFC5245]
[RFC5245]	[RFC5245]

[RFC5245]
[RFC5245]

```
raddr 192.168.1.7 rport 58679
a=candidate:0 2 UDP 2113667326 192.168.1.7 56607 typ host
a=candidate:1 2 UDP 1694302206 98.248.92.77 56607 typ srflx
raddr 192.168.1.7 rport 56607
```

[RFC5245]


Table 12: 5.5 SDP Answer w/BUNDLE

5.6. Successful One Way Session with 2 Video Streams

TOC

In this scenario Alice and Bob engage in one-way multimedia session with Bob receiving two video streams, one corresponding to Alice's video and other corresponding to her presentation slides.

1 Way Audio & Video w/2 Video Streams

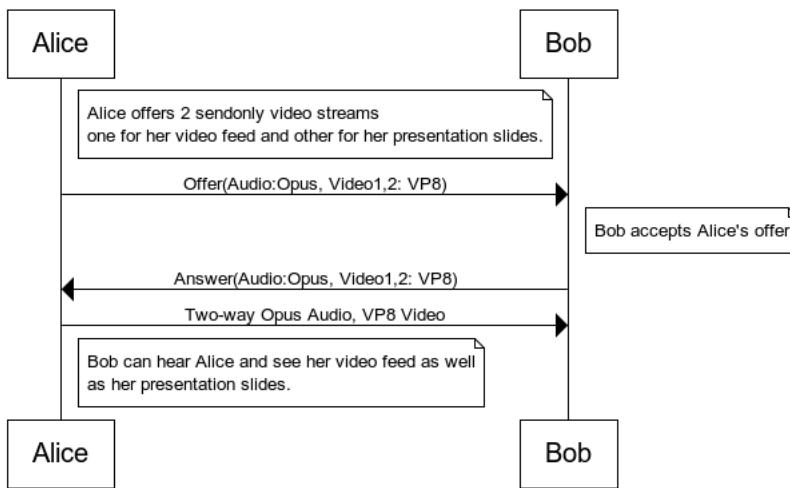

SDP Contents	RFC#/Notes
v=0	[RFC4566]
o=alice 20519 0 IN IP4 0.0.0.0	[RFC4566]
s=	[RFC4566]
t=0 0	[RFC4566]
a=ice-ufrag:074c6550	[RFC5245]
a=ice-pwd:a28a397a4c3f31747d1ee3474af08a068	[RFC5245]
a=fingerprint:sha-1 99:41:49:83:4a:97:0e:1f:ef:6d:f7:c9:c7:70:9d:1f:66:79:a8:07	[RFC5245]
a=rtpcp-rsize	[RFC5506]
m=audio 54609 RTP/SAVPF 109	[RFC4566]
c= IN IP4 24.23.204.141	[RFC4566]
a=rtpmap:109 opus/48000	[draft-spittka-payload-rtp-opus]
a=ptime:20	[draft-spittka-payload-rtp-opus]
a=sendonly	[RFC3264] - Send only audio stream
a=rtpcp-mux	[RFC5761]
a=candidate:0 1 UDP 2113667327 192.168.1.4 54609 typ host	[RFC5245]
a=candidate:0 2 UDP 2113667326 192.168.1.4 64678 typ host	[RFC5245]
a=rtpcp-fb:109 nack	[RFC5104]
m=video 62537 RTP/SAVPF 120	[RFC4566]
c= IN IP4 24.23.204.141	[RFC4566]
a=rtpmap:120 VP8/90000	[draft-ietf-payload-vp8]
a=content:speaker	[RFC4796] - Stream 1 for Alice's video
a=sendonly	[RFC3264] - Send only video stream
a=rtpcp-mux	[RFC5761]
a=candidate:0 1 UDP 2113667327 192.168.1.4 62537 typ host	[RFC5245]

a=candidate:0 2 UDP 2113667326 192.168.1.4 54721 typ host	[RFC5245]
a=rtcp-fb:120 nack pli	[RFC5104]
a=rtcp-fb:120 ccm fir	[RFC5104]
m=video 62539 RTP/SAVPF 120	[RFC4566]
c= IN IP4 24.23.204.141	[RFC4566]
a=rtpmap:120 VP8/90000	[draft-ietf-payload-vp8]
a=content:slides	[RFC4796] - Stream 2 for Alice's slides
a=sendonly	[RFC3264] - Send only video stream
a=rtcp-mux	[RFC5761]
a=candidate:0 1 UDP 2113667327 192.168.1.4 62539 typ host	[RFC5245]
a=candidate:0 2 UDP 2113667326 192.168.1.4 54723 typ host	[RFC5245]
a=rtcp-fb:120 nack pli	[RFC5104]
a=rtcp-fb:120 ccm fir	[RFC5104]

Table 13: 5.6 SDP Offer

SDP Contents	RFC#/Notes
v=0	[RFC4566]
o=bob 16833 0 IN IP4 0.0.0.0	[RFC4566]
s=	[RFC4566]
t=0 0	[RFC4566]
a=ice-ufrag:c300d85b	[RFC5245]
a=ice-pwd:de4e99bd291c325921d5d47efbabd9a2	[RFC5245]
a=fingerprint:sha-1 99:41:49:83:4a:97:0e:1f:ef:6d:f7:c9:c7:70:9d:1f:66:79:a8:07	[RFC5245]
a=rtcp-rsize	[RFC5506]
m=audio 49203 RTP/SAVPF 109	[RFC4566]
c= IN IP4 98.248.92.77	[RFC4566]
a=rtpmap:109 opus/48000	[draft-spittka-payload-rtp-opus]
a=ptime:20	[draft-spittka-payload-rtp-opus]
a=recvonly	[RFC3264] - Receive only audio stream
a=rtcp-mux	[RFC5761]
a=candidate:0 1 UDP 2113667327 192.168.1.7 49203 typ host	[RFC5245]
a=candidate:0 2 UDP 2113667326 192.168.1.7 60065 typ host	[RFC5245]
m=video 63130 RTP/SAVPF 120	[RFC4566]
c= IN IP4 98.248.92.771	[RFC4566]
a=rtpmap:120 VP8/90000	[draft-ietf-payload-vp8]
a=content:speaker	[RFC4796] - Stream 1 for Alice's Video
a=recvonly	[RFC3264] - Receive Only Video Stream 1
a=rtcp-mux	[RFC5761]
a=candidate:0 1 UDP 2113667327 192.168.1.7 63130 typ host	[RFC5245]
a=candidate:0 2 UDP 2113667326 192.168.1.7 56607 typ host	[RFC5245]
a=rtcp-fb:120 nack pli	[RFC5104]
a=rtcp-fb:120 ccm fir	[RFC5104]
m=video 63133 RTP/SAVPF 120	[RFC4566]
c= IN IP4 98.248.92.771	[RFC4566]
a=rtpmap:120 VP8/90000	[draft-ietf-payload-vp8]
a=content:slides	[RFC4796] - Stream 2 for Alice's Slides
a=recvonly	[RFC3264] - Receive Only Video Stream 2
a=rtcp-mux	[RFC5761]
a=candidate:0 1 UDP 2113667327 192.168.1.7 63133 typ host	[RFC5245]
a=candidate:0 2 UDP 2113667326 192.168.1.7 56609 typ host	[RFC5245]
a=rtcp-fb:120 nack pli	[RFC5104]
a=rtcp-fb:120 ccm fir	[RFC5104]


Table 14: 5.6 SDP Answer

5.7. Add New Media (video)

TOC

This scenario describes the message exchanges when Alice decides to add video to an existing audio-only session

Add New Media (Video)

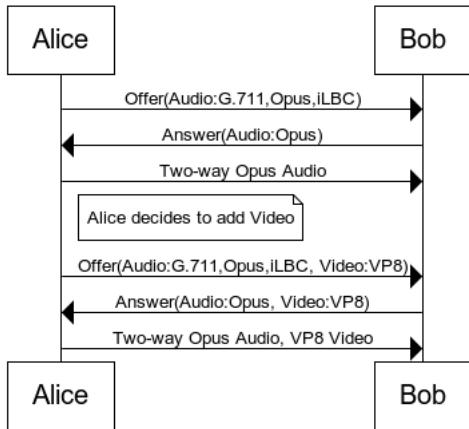

SDP Contents	RFC#/Notes
v=0	[RFC4566]
o=alice 20519 0 IN IP4 0.0.0.0	[RFC4566]
s=	[RFC4566]
t=0 0	[RFC4566]
a=ice-ufrag:074c6550	[RFC5245]
a=ice-pwd:a28a397a4c3f31747d1ee3474af08a068	[RFC5245]
a=fingerprint:sha-1 99:41:49:83:4a:97:0e:1f:ef:6d:f7:c9:c7:70:9d:1f:66:79:a8:07	[RFC5245]
a=rtp-rsize	[RFC5506]
m=audio 54609 RTP/SAVPF 0 109 98	[RFC4566]
c= IN IP4 24.23.204.141	[RFC4566]
a=rtpmap:0 PCMU/8000	[RFC3551]
a=rtpmap:109 opus/48000	[draft-spittka-payload-rtp-opus]
a=ptime:20	[draft-spittka-payload-rtp-opus]
a=rtpmap:98 iLBC/8000 a=fmtp:98 mode=20	[RFC3952]
a=sendrecv	[RFC3264]
a=rtp-mux	[RFC5761]
b=AS:256	[RFC4566]
a=candidate:0 1 UDP 2113667327 192.168.1.4 54609 typ host	[RFC5245]
a=candidate:1 1 UDP 694302207 24.23.204.141 54609 typ srflx raddr 192.168.1.4 rport 54609	[RFC5245]
a=candidate:0 2 UDP 2113667326 192.168.1.4 64678 typ host	[RFC5245]
a=candidate:1 2 UDP 1694302206 24.23.204.141 64678 typ srflx raddr 192.168.1.4 rport 64678	[RFC5245]
a=rtp-fb:109 nack	[RFC5104]

Table 15: 5.7 SDP Initial Audio Only Offer

SDP Contents	RFC#/Notes
v=0	[RFC4566]
o=bob 16833 0 IN IP4 0.0.0.0	[RFC4566]
s=	[RFC4566]
t=0 0	[RFC4566]
a=ice-ufrag:c300d85b	[RFC5245]
a=ice-pwd:de4e99bd291c325921d5d47efbabd9a2	[RFC5245]
a=fingerprint:sha-1 99:41:49:83:4a:97:0e:1f:ef:6d:f7:c9:c7:70:9d:1f:66:79:a8:07	[RFC5245]
a=rtp-rsize	[RFC5506]
m=audio 49203 RTP/SAVPF 109	[RFC4566]
c= IN IP4 98.248.92.77	[RFC4566]
a=rtpmap:109 opus/48000	[draft-spittka-payload-rtp-opus]

a=ptime:20	[draft-spittka-payload-rtp-opus]
a=sendrecv	[RFC3264]
a=rtp-mux	[RFC5761]
a=candidate:0 1 UDP 2113667327 192.168.1.7 49203 typ host	[RFC5245]
a=ccandidate:1 1 UDP 1694302207 98.248.92.77 49203 typ srflx raddr 192.168.1.7 rport 49203	[RFC5245]
a=candidate:candidate:0 2 UDP 2113667326 192.168.1.7 60065 typ host	[RFC5245]
a=candidate:1 2 UDP 1694302206 98.248.92.77 60065 typ srflx raddr 192.168.1.7 rport 60065	[RFC5245]

Table 16: 5.7 SDP Answer- Audio Only

Alice decides to add Video to the current session

SDP Contents	RFC#/Notes
v=0	[RFC4566]
o=alice 20520 0 IN IP4 0.0.0.0	[RFC4566] - Increased Version Number
s=	[RFC4566]
t=0 0	[RFC4566]
a=ice-ufrag:074c6550	[RFC5245]
a=ice-pwd:a28a397a4c3f31747d1ee3474af08a068	[RFC5245]
a=fingerprint:sha-1 99:41:49:83:4a:97:0e:1f:ef:6d:f7:c9:c7:70:9d:1f:66:79:a8:07	[RFC5245]
a=rtp-rsize	[RFC5506]
m=audio 54609 RTP/SAVPF 0 109 98	[RFC4566]
c= IN IP4 24.23.204.141	[RFC4566]
a=rtpmap:0 PCMU/8000	[RFC3551]
a=rtpmap:109 opus/48000	[draft-spittka-payload-rtp-opus]
a=ptime:20	[draft-spittka-payload-rtp-opus]
a=rtpmap:98 iLBC/8000 a=fmtp:98 mode=20	[RFC3952]
a=sendrecv	[RFC3264]
a=rtp-mux	[RFC5761]
a=candidate:0 1 UDP 2113667327 192.168.1.4 54609 typ host	[RFC5245]
a=candidate:1 1 UDP 694302207 24.23.204.141 54609 typ srflx raddr 192.168.1.4 rport 54609	[RFC5245]
a=candidate:0 2 UDP 2113667326 192.168.1.4 64678 typ host	[RFC5245]
a=candidate:1 2 UDP 1694302206 24.23.204.141 64678 typ srflx raddr 192.168.1.4 rport 64678	[RFC5245]
a=rtp-fb:109 nack	[RFC5104]
m=video 62537 RTP/SAVPF120	[RFC4566]
c= IN IP4 24.23.204.141	[RFC4566]
a=rtpmap:120 VP8/90000	[draft-ietf-payload-vp8]
a=sendrecv	[RFC3264]
a=rtp-mux	[RFC5761]
a=candidate:0 1 UDP 2113667327 192.168.1.4 62537 typ host	[RFC5245]
a=candidate:1 1 UDP 1694302207 24.23.204.141 62537 typ srflx raddr 192.168.1.4 rport 62537	[RFC5245]
a=candidate:0 2 2113667326 192.168.1.4 54721 typ host	[RFC5245]
a=candidate:1 2 UDP 1694302206 24.23.204.141 54721 typ srflx raddr 192.168.1.4 rport 54721	[RFC5245]
a=rtp-fb:120 nack pli	[RFC5104]
a=rtp-fb:120 ccm fir	[RFC5104]

Table 17: 5.7 SDP Updated Offer w/Video

SDP Contents	RFC#/Notes
v=0	[RFC4566]
o=bob 16833 0 IN IP4 0.0.0.0	[RFC4566]
s=	[RFC4566]
t=0 0	[RFC4566]
a=ice-ufrag:c300d85b	[RFC5245]
a=ice-pwd:de4e99bd291c325921d5d47efbabd9a2	[RFC5245]

a=fingerprint:sha-1 99:41:49:83:4a:97:0e:1f:ef:6d:f7:c9:c7:70:9d:1f:66:79:a8:07	[RFC5245]
a=rtp-rsize	[RFC5506]
m=audio 49203 RTP/SAVPF 109	[RFC4566]
c= IN IP4 98.248.92.77	[RFC4566]
a=rtpmap:109 opus/48000	[draft-spittka-payload-rtp-opus]
a=ptime:20	[draft-spittka-payload-rtp-opus]
a=sendrecv	[RFC3264]
a=rtcp-mux	[RFC5761]
a=candidate:0 1 UDP 2113667327 192.168.1.7 49203 typ host	[RFC5245]
a=ccandidate:1 1 UDP 1694302207 98.248.92.77 49203 typ srflx raddr 192.168.1.7 rport 49203	[RFC5245]
a=candidate:candidate:0 2 UDP 2113667326 192.168.1.7 60065 typ host	[RFC5245]
a=candidate:1 2 UDP 1694302206 98.248.92.77 60065 typ srflx raddr 192.168.1.7 rport 60065	[RFC5245]
m=video 63130 RTP/SAVPF 99 120	[RFC4566]
c= IN IP4 98.248.92.771	[RFC4566]
a=rtpmap:120 VP8/90000	[draft-ietf-payload-vp8]
a=sendrecv	[RFC3264]
a=rtcp-mux	[RFC5761]
a=candidate:0 1 UDP 2113667327 192.168.1.7 63130 typ host	[RFC5245]
a=ccandidate:1 1 UDP 1694302207 98.248.92.77 63130 typ srflx raddr 192.168.1.7 rport 63130	[RFC5245]
a=candidate:0 2 UDP 2113667326 192.168.1.7 56607 typ host	[RFC5245]
a=candidate:1 2 UDP 1694302206 98.248.92.77 56607 typ srflx raddr 192.168.1.7 rport 56607	[RFC5245]


Table 18: 5.7 SDP Updated Answer

5.8. Successful Simulcast with 2 Encodings, 2 Cameras

TOC

The SDP Offer/Answer exchange illustrates simulcasting use-case, where Alice 2 cameras with 2 encoding options per camera.

2 Way Successful Simulcast

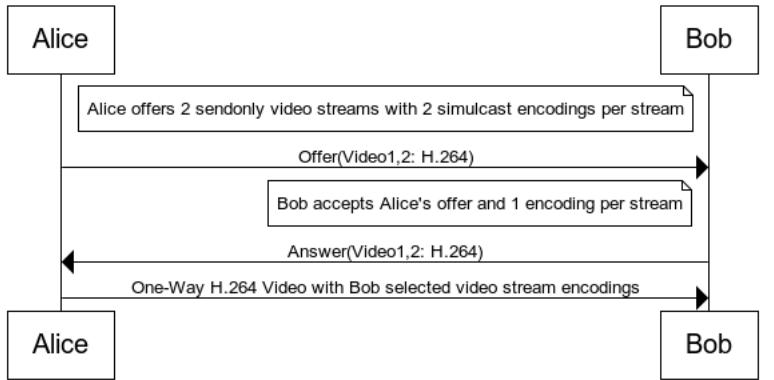

www.websequencediagrams.com

SDP Contents	RFC#/Notes
v=0	[RFC4566]
o=alice 20519 0 IN IP4 0.0.0.0	[RFC4566]
s=	[RFC4566]
t=0	[RFC4566]
a=ice-ufrag:074c6550	[RFC5245]
a=ice-pwd:a28a397a4c3f31747d1ee3474af08a068	[RFC5245]
a=fingerprint:sha-1 99:41:49:83:4a:97:0e:1f:ef:6d:f7:c9:c7:70:9d:1f:66:79:a8:07	[RFC5245]
m=video 62537 RTP/SAVPF 96	[RFC4566]
c= IN IP4 24.23.204.141	[RFC4566]
a=rtpmap:96 H264/90000	[RFC3984]
a:ssrc:12345 cname:user1@host1.example.com	[RFC5576] Camera-1,Encoding-1 SSRC
a:ssrc:12345 imageattr:* [x=720,y=576]	[RFC5576] Camera-1,Encoding-1 Resolution

a=ssrc:12345 framerate:30	[RFC5576] Camera-1,Encoding-1 Framerate
a=ssrc:67890 cname:user2@host2.example.com	[RFC5576] Camera-1,Encoding-2 SSRC
a=ssrc:67890 imageattr:* [x=176,y=144]	[RFC5576] Camera-1,Encoding-2 Resolution
a=ssrc:67890 framerate:15	[RFC5576] Camera-1, Encoding-2 Framerate
a=sendonly	[RFC3264] - Send only video stream
a=candidate:0 1 UDP 2113667327 192.168.1.4 62537 typ host	[RFC5245]
a=candidate:0 2 UDP 2113667326 192.168.1.4 54721 typ host	[RFC5245]
m=video 62539 RTP/SAVPF 97	[RFC4566]
c= IN IP4 24.23.204.141	[RFC4566]
a=rtpmap:97 H264/90000	[RFC3984]
a:ssrc:54321 cname:user1@host1.example.com	[RFC5576] Camera-2,Encoding-1 SSRC
a:ssrc:54321 imageattr:* [x=352,y=288]	[RFC5576] Camera-2,Encoding-1 Resolution
a:ssrc:54321 framerate:30	[RFC5576] Camera-2,Encoding-1 Framerate
a:ssrc:98760 cname:user2@host2.example.com	[RFC5576] Camera-2,Encoding-2 SSRC
a:ssrc:98760 imageattr:* [x=176,y=144]	[RFC5576] Camera-2,Encoding-2 Resolution
a:ssrc:98760 framerate:15	[RFC5576] Camera-2,Encoding-2 Framerate
a=sendonly	[RFC3264] - Send only video stream
a=candidate:0 1 UDP 2113667327 192.168.1.4 62539 typ host	[RFC5245]
a=candidate:0 2 UDP 2113667326 192.168.1.4 54723 typ host	[RFC5245]

Table 19: 5.8 SDP Offer

SDP Contents	RFC#/Notes
v=0	[RFC4566]
o=bob 16833 0 IN IP4 0.0.0.0	[RFC4566]
s=	[RFC4566]
t=0 0	[RFC4566]
a=ice-ufrag:c300d85b	[RFC5245]
a=ice-pwd:de4e99bd291c325921d5d47efbabd9a2	[RFC5245]
a=fingerprint:sha-1	[RFC5245]
99:41:49:83:4a:97:0e:1f:ef:6d:f7:c9:c7:70:9d:1f:66:79:a8:07	[RFC5245]
m=video 63130 RTP/SAVPF 96	[RFC4566]
c= IN IP4 98.248.92.771	[RFC4566]
a=rtpmap:96 H264/90000	[RFC3984]
a=remote-ssrc:12345 recv:on	[draft-lennox-mmusic-sdp-source-selection] Stream-1,Encoding-1 Accepted
a=remote-ssrc:67890 recv:off	[RFC5576] Stream-1,Encoding-2 Not Accepted
a=recvonly	[RFC3264] - Receive Only Video Stream 1
a=candidate:0 1 UDP 2113667327 192.168.1.7 63130 typ host	[RFC5245]
a=candidate:0 2 UDP 2113667326 192.168.1.7 56607 typ host	[RFC5245]
m=video 63133 RTP/SAVPF 97	[RFC4566]
c= IN IP4 98.248.92.771	[RFC4566]
a=rtpmap:97 H264/90000	[RFC3984]
a=remote-ssrc:54321 recv:off	[draft-lennox-mmusic-sdp-source-selection] Stream-2, Encoding-1 Not Accepted
a:ssrc:67890 recv:on	[draft-lennox-mmusic-sdp-source-selection] Stream-2,Encoding-2 Accepted
a=recvonly	[RFC3264] - Receive Only Video Stream 2
a=rtp-mux	[RFC5761]
a=candidate:0 1 UDP 2113667327 192.168.1.7 63133 typ host	[RFC5245]
a=candidate:0 2 UDP 2113667326 192.168.1.7 56609 typ host	[RFC5245]
a=rtcp-fb:120 nack pli	[RFC5104]
a=rtcp-fb:120 ccm fir	[RFC5104]


Table 20: 5.8 SDP Answer

5.9. Successful SVC Video Stream

TOC

In the example Offer/Answer exchange mechanism below, Alice Offers 3 media descriptions of type video along with the layered decoding dependencies between them. On the other hand, Bob accepts only 2 of 3 Operation points offered by Alice.

2 way SVC Video

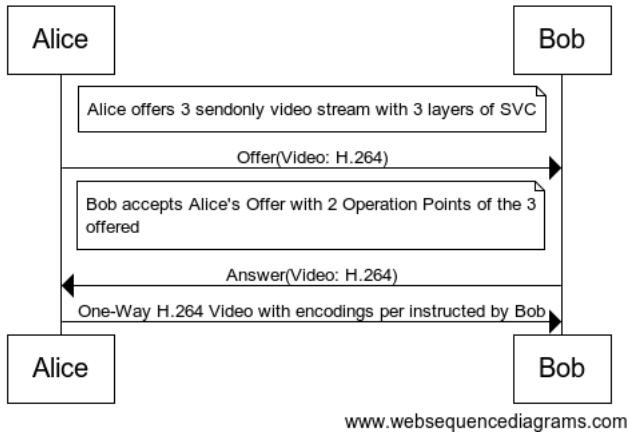

www.websequencediagrams.com

SDP Contents	RFC#/Notes
v=0	[RFC4566]
o=alice 20519 0 IN IP4 0.0.0.0	[RFC4566]
s=	[RFC4566]
t=0 0	[RFC4566]
a=ice-ufrag:074c6550	[RFC5245]
a=ice-pwd:a28a397a4c3f31747d1ee3474af08a068	[RFC5245]
a=fingerprint:sha-1	[RFC5245]
99:41:49:83:4a:97:0e:1f:ef:6d:f7:c9:c7:70:9d:1f:66:79:a8:07	
a=group:DDP L1 L2 L3	[RFC5583] Streams L1,L2,L3 are grouped with layer decoding dependency
m=video 62537 RTP/SAVPF 96 97	[RFC4566]
c= IN IP4 24.23.204.141	[RFC4566]
b=AS:90	[RFC4566]
b=framerate:15	[RFC4566]
a=rtpmap:96 H264/90000	[RFC3984]
a=rtpmap:97 H264/90000	[RFC3984]
a=mid:L1	[RFC5888]
a=sendonly	[RFC3264] - Send only video stream
a=candidate:0 1 UDP 2113667327 192.168.1.4 62537 typ host	[RFC5245]
a=candidate:0 2 UDP 2113667326 192.168.1.4 54721 typ host	[RFC5245]
m=video 62539 RTP/SAVPF 98 99	[RFC4566]
c= IN IP4 24.23.204.141	[RFC4566]
b=AS:64	[RFC4566]
b=framerate:15	[RFC4566]
a=rtpmap:98 H264-SVC/90000	[RFC3984]
a=rtpmap:99 H264-SVC/90000	[RFC3984]
a=mid:L2	[RFC5888]
a=depend:98 lay L1:96,97; 99 lay L1:97	[RFC5583]
a=sendonly	[RFC3264] - Send only video stream
a=candidate:0 1 UDP 2113667327 192.168.1.4 62539 typ host	[RFC5245]
a=candidate:0 2 UDP 2113667326 192.168.1.4 54723 typ host	[RFC5245]
m=video 62890 RTP/SAVPF 100 101	[RFC4566]
c= IN IP4 24.23.204.141	[RFC4566]
b=AS:128	[RFC4566]
b=framerate:30	[RFC4566]
a=rtpmap:100 H264-SVC/90000	[RFC3984]
a=rtpmap:101 H264-SVC/90000	[RFC3984]
a=mid:L3	[RFC5888]
a=depend:100 lay L1:96,97; 101 lay L1:97 L2:99	[RFC5583]
a=sendonly	[RFC3264] - Send only video stream

a=candidate:0 1 UDP 2113667327 192.168.1.4 62890 typ host	[RFC5245]
a=candidate:0 2 UDP 2113667326 192.168.1.4 54723 typ host	[RFC5245]

Table 21: 5.9 SDP Offer

SDP Contents	RFC#/Notes
v=0	[RFC4566]
o=bob 16833 0 IN IP4 0.0.0.0	[RFC4566]
s=	[RFC4566]
t=0 0	[RFC4566]
a=ice-ufrag:c300d85b	[RFC5245]
a=ice-pwd:de4e99bd291c325921d5d47efbabd9a2	[RFC5245]
a=fingerprint:sha-1 99:41:49:83:4a:97:0e:1f:ef:6d:f7:c9:c7:70:9d:1f:66:79:a8:07	[RFC5245]
a=group:DDP L1 L2 L3	[RFC5583] Streams L1,L2,L3 are grouped with layer decoding dependency
m=video 62537 RTP/SAVPF 96 97	[RFC4566]
c= IN IP4 98.248.92.7711	[RFC4566]
b=AS:90	[RFC4566]
b=framerate:15	[RFC4566]
a=rtpmap:96 H264/90000	[RFC3984]
a=rtpmap:97 H264/90000	[RFC3984]
a=mid:L1	[RFC5888]
a=recvonly	[RFC3264] - Send only video stream
a=candidate:0 1 UDP 2113667327 192.168.1.4 62537 typ host	[RFC5245]
a=candidate:0 2 UDP 2113667326 192.168.1.4 54721 typ host	[RFC5245]
m=video 62539 RTP/SAVPF 98 99	[RFC4566]
c= IN IP4 98.248.92.771	[RFC4566]
b=AS:64	[RFC4566]
b=framerate:15	[RFC4566]
a=rtpmap:98 H264-SVC/90000	[RFC3984]
a=rtpmap:99 H264-SVC/90000	[RFC3984]
a=mid:L2	[RFC5888]
a=depend:98 lay L1:96,97; 99 lay L1:97	[RFC5583]
a=recvonly	[RFC3264] - Send only video stream
a=candidate:0 1 UDP 2113667327 192.168.1.4 62539 typ host	[RFC5245]
a=candidate:0 2 UDP 2113667326 192.168.1.4 54723 typ host	[RFC5245]
m=video 0 RTP/SAVPF 100 101	[RFC4566] Port is set to 0
c= IN IP4 98.248.92.771	[RFC4566]
b=AS:128	[RFC4566]
b=framerate:30	[RFC4566]
a=rtpmap:100 H264-SVC/90000	[RFC3984]
a=rtpmap:101 H264-SVC/90000	[RFC3984]
a=mid:L3	[RFC5888]
a=depend:100 lay L1:96,97; 101 lay L1:97 L2:99	[RFC5583]
a=recvonly	[RFC3264] - Send only video stream
a=candidate:0 1 UDP 2113667327 192.168.1.4 62890 typ host	[RFC5245]
a=candidate:0 2 UDP 2113667326 192.168.1.4 54723 typ host	[RFC5245]

Table 22: 5.9 SDP Answer

6. WebRTC <-> Legacy Interop Examples

TOC

In this section, we attempt to provide session descriptions showcasing inter-operability between a WebRTC end-point and a Legacy VOIP end-point. The ideas included in here are not fully baked into the standards and might be controversial in nature. The hope here is to demonstrate a plausible SDP composition to enhance seamless inter-operability between the aforementioned communication systems.

TOC

6.1. Secure Two-Way Audio,Video w/Feedback - WebRTC <-> Legacy Interop

In the scenario described below, Alice sends [\[RFC3264\]](#) Offer with two sets of media descriptions per media type.


One set that corresponds to [\[WEBRTC\]](#) Compliant RTP/SAVPF based audio and video descriptions.

Another set with RTP/AVP based audio and video descriptions for the legacy Interop purposes.

Also to note, Alice includes session level DTLS information and media level RTCP feedback information as applicable to both the sets of media descriptions

On the other hand, Bob being a Legacy VOIP end-point, recognizes only the media descriptions with RTP/AVP as the application protocol. The security and feedback requirements for the session are either handled by a intermediate gateway or with some combination of Bob's capabilities and the intermediate gateway.

Successful 2-Way WebRTC <-> VOIP Interop

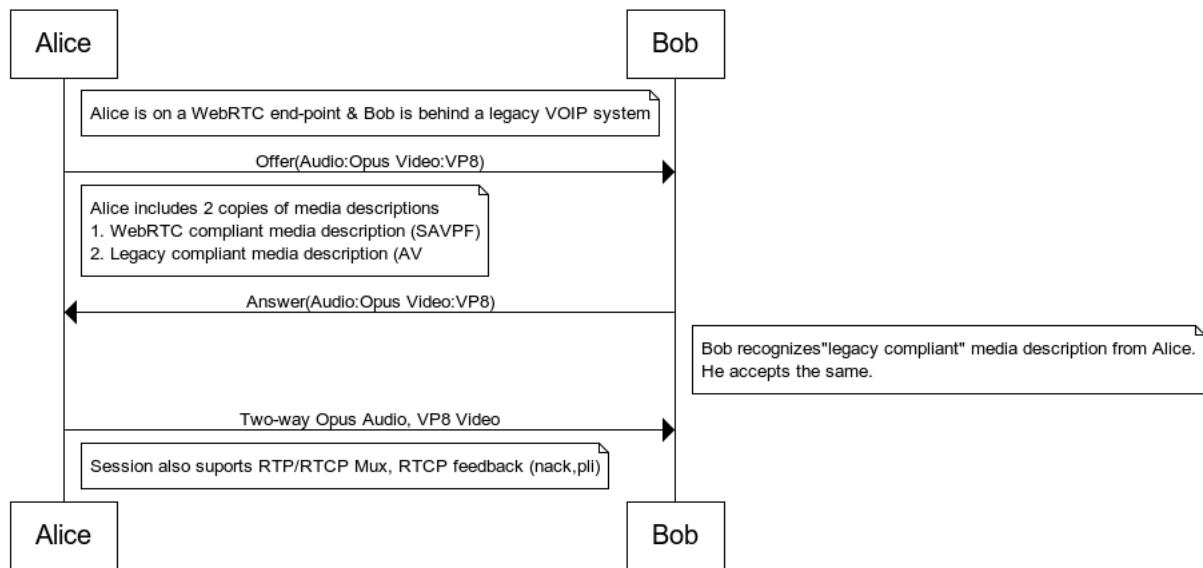

SDP Contents	RFC# / Notes
v=0	[RFC4566]
o=alice 20518 0 IN IP4 0.0.0.0	[RFC4566]
s=	[RFC4566]
t=0 0	[RFC4566]
a=ice-ufrag:074c6550	[RFC5245]
a=ice-pwd:a28a397a4c3f31747d1ee3474af08a068	[RFC5245]
a=fingerprint:sha-1	[RFC5245]
99:41:49:83:4a:97:0e:1f:ef:6d:f7:c9:c7:70:9d:1f:66:79:a8:07	[RFC5245]
a=rtpcp-rsize	[RFC5506]
m=audio 54609 RTP/SAVPF 109	[RFC4566]
c= IN IP4 24.23.204.141	[RFC4566]
a=rtpmap:109 opus/48000	[draft-spittka-payload-rtp-opus]
a=ptime:20	[draft-spittka-payload-rtp-opus]
a=sendrecv	[RFC3264]
a=rtcp-mux	[RFC5761]
a=candidate:0 1 UDP 2113667327 192.168.1.4 54609 typ host	[RFC5245]
a=candidate:1 1 UDP 694302207 24.23.204.141 54609 typ srflx	[RFC5245]
raddr 192.168.1.4 rport 54609	[RFC5245]
a=candidate:0 2 UDP 2113667326 192.168.1.4 64678 typ host	[RFC5245]
a=candidate:1 2 UDP 1694302206 24.23.204.141 64678 typ srflx	[RFC5245]
raddr 192.168.1.4 rport 64678	[RFC5104]
a=rtp-fb:109 nack	[RFC5104]
m=video 62537 RTP/SAVPF 120	[RFC4566]

c= IN IP4 24.23.204.141	[RFC4566]
a=rtpmap:120 VP8/90000	[draft-ietf-payload-vp8]
a=sendrecv	[RFC3264]
a=rtcp-mux	[RFC5761]
a=candidate:0 1 UDP 2113667327 192.168.1.4 62537 typ host	[RFC5245]
a=candidate:1 1 UDP 1694302207 24.23.204.141 62537 typ srflx	[RFC5245]
raddr 192.168.1.4 rport 62537	
a=candidate:0 2 2113667326 192.168.1.4 54721 typ host	[RFC5245]
a=candidate:1 2 UDP 1694302206 24.23.204.141 54721 typ srflx	[RFC5245]
raddr 192.168.1.4 rport 54721	
a=rtcp-fb:120 nack pli	[RFC5104]
a=rtcp-fb:120 ccm fir	[RFC5104]

m=audio 54732 RTP/AVP 109	
c= IN IP4 24.23.204.141	
a=fingerprint:sha-1	
99:41:49:83:4a:97:0e:1f:7f:d:f9:c9:c7:70:9d:1f:66:79:a8:07	
a=rtpmap:109 opus/48000	[RFC4566] Alice includes RTP/AVP audio stream description
a=ptime:20	[RFC4566]
a=sendrecv	[RFC5245]
a=rtcp-mux	[RFC3264]
a=candidate:0 1 UDP 2113667327 192.168.1.4 54732 typ host	[RFC5761] Alice still includes RTP/RTCP Mux support
a=candidate:1 1 UDP 694302207 24.23.204.141 54732 typ srflx	[RFC5245]
raddr 192.168.1.4 rport 54732	
a=candidate:0 2 UDP 2113667326 192.168.1.4 64678 typ host	[RFC5245]
a=candidate:1 2 UDP 1694302206 24.23.204.141 64678 typ srflx	[RFC5245]
raddr 192.168.1.4 rport 64678	
a=rtcp-fb:109 nack	[RFC5104] She adds her intent for NACK RTCP feedback support
m=video 62445 RTP/AVP 120	
c= IN IP4 24.23.204.141	
a=fingerprint:sha-1	
99:41:49:83:4a:97:0e:1f:ef:7d:f7:c9:c7:70:9d:1f:66:79:a8:07	
a=rtpmap:120 VP8/90000	[RFC4566] Alice includes RTP/AVP video stream description
a=sendrecv	[RFC5245]
a=rtcp-mux	[RFC3264]
a=candidate:0 1 UDP 2113667327 192.168.1.4 62445 typ host	[RFC5761] Alice intends to perform RTP/RTCP Mux
a=candidate:1 1 UDP 1694302207 24.23.204.141 62537 typ srflx	[RFC5245]
raddr 192.168.1.4 rport 62445	
a=candidate:0 2 2113667326 192.168.1.4 54721 typ host	[RFC5245]
a=candidate:1 2 UDP 1694302206 24.23.204.141 54721 typ srflx	[RFC5245]
raddr 192.168.1.4 rport 54721	
a=rtcp-fb:120 nack pli	[RFC5104] Alice indicates support for Picture loss Indication and NACK RTCP feedback
a=rtcp-fb:120 ccm fir	[RFC5104]

Table 23: 6.1 SDP Offer

SDP Contents	RFC# / Notes
v=0	[RFC4566]
o=bob 16833 0 IN IP4 0.0.0.0	[RFC4566]
s=	[RFC4566]
t=0 0	[RFC4566]
a=ice-ufrag:c300d85b	[RFC5245]
a=ice-pwd:de4e99bd291c325921d5d47efbabd9a2	[RFC5245]
a=fingerprint:sha-1 99:41:49:83:4a:97:0e:1f:ef:6d:f7:c9:c7:70:9d:1f:66:79:a8:07	[RFC5245]
m=audio 49203 RTP/AVP 109	[RFC4566] Bob accepts RTP/AVP based audio stream
c= IN IP4 98.248.92.77	[RFC4566]
a=rtpmap:109 opus/48000	[draft-spittka-payload-rtp-opus]
a=ptime:20	[draft-spittka-payload-rtp-opus]

a=sendrecv	[RFC3264]
a=candidate:0 1 UDP 2113667327 192.168.1.7 49203 typ host	[RFC5245]
a=ccandidate:1 1 UDP 1694302207 98.248.92.77 49203 typ srflx raddr 192.168.1.7 rport 49203	[RFC5245]
a=candidate:candidate:0 2 UDP 2113667326 192.168.1.7 60065 typ host	[RFC5245]
a=candidate:1 2 UDP 1694302206 98.248.92.77 60065 typ srflx raddr 192.168.1.7 rport 60065	[RFC5245]
m=video 63130 RTP/SAVP 120	[RFC4566] Bob accepts RTP/AVP based video stream
c= IN IP4 98.248.92.771	[RFC4566]
a=rtpmap:120 VP8/90000	[draft-ietf-payload-vp8]
a=sendrecv	[RFC3264]
a=candidate:0 1 UDP 2113667327 192.168.1.7 63130 typ host	[RFC5245]
a=candidate:1 1 UDP 1694302207 98.248.92.77 63130 typ srflx raddr 192.168.1.7 rport 63130	[RFC5245]
a=candidate:0 2 UDP 2113667326 192.168.1.7 56607 typ host	[RFC5245]
a=candidate:1 2 UDP 1694302206 98.248.92.77 56607 typ srflx raddr 192.168.1.7 rport 56607	[RFC5245]

Table 24: 6.1 SDP Answer

7. IANA Considerations

TOC

This document requires no actions from IANA.

8. Change Log

TOC

[RFC EDITOR NOTE: Please remove this section when publishing]

Changes from draft-nandakumar-rtcweb-sdp-00

- Fixed editorial comments on the mailing list.
- Updated Data-channel SDP information based on draft-ietf-mmusic-sctp-sdp.
- Updated BUNDLE examples based on draft-ietf-mmusic-sdp-bundle-negotiation.
- Added examples for few more BUNDLE variants
- Added new examples for Simulcast and SVC

9. References

TOC

9.1. Normative References

TOC

- [RFC3264] Rosenberg, J. and H. Schulzrinne, "[An Offer/Answer Model with Session Description Protocol \(SDP\)](#)," RFC 3264, June 2002 ([TXT](#)).
 [RFC4566] Handley, M., Jacobson, V., and C. Perkins, "[SDP: Session Description Protocol](#)," RFC 4566, July 2006 ([TXT](#)).
 [RFC2119] [Bradner, S.](#), "[Key words for use in RFCs to Indicate Requirement Levels](#)," BCP 14, RFC 2119, March 1997 ([TXT](#), [HTML](#), [XML](#)).

9.2. Informative References

TOC

- [RFC5245] Rosenberg, J., "[Interactive Connectivity Establishment \(ICE\): A Protocol for Network Address Translator \(NAT\) Traversal for Offer/Answer Protocols](#)," RFC 5245, July 2006 ([TXT](#)).
 [WEBRTC] W3C, "WebRTC 1.0: Real-time Communication Between Browsers," <<http://dev.w3.org/2011/webrtc/editor/webrtc.html>> .
 [JSEP] Uberti, J. and C. Jennings, "[Javascript Session Establishment Protocol](#)," draft-ietf-rtcweb-jsep-01 (work in progress), December 2012 ([TXT](#)).
 [RFC5506] Johansson, I., "[Support for Reduced-Size Real-Time Transport Control Protocol \(RTCP\): Opportunities and Consequences](#)," RFC 5506, April 2009 ([TXT](#)).
 [RFC3551] Schulzrinne, H. and S. Casner, "[RTP Profile for Audio and Video Conferences with Minimal Control](#)," RFC 3551, July 2003 ([TXT](#)).
 [RFC3952] Duric, A. and S. Andersen, "[Real-time Transport Protocol \(RTP\) Payload Format for internet Low Bit Rate Codec \(ILBC\) Speech](#)," RFC 3952, December 2004 ([TXT](#)).
 [RFC4796] Hautakorpi, J. and G. Camarillo, "[The Session Description Protocol \(SDP\) Content Attribute](#)," RFC 4796, February 2007 ([TXT](#)).
 [RFC5761] Perkins, C. and M. Westerlund, "[Multiplexing RTP Data and Control Packets on a Single Port](#)," RFC 5761, April 2010 ([TXT](#)).
 [RFC3556] Casner, S., "[Session Description Protocol \(SDP\) Bandwidth Modifiers for RTP Control Protocol \(RTCP\) Bandwidth](#)," RFC 3556, July 2003 ([TXT](#)).
 [RFC5104] Wenger, S., Chandra, U., Westerlund, M., and B. Burman, "[Codec Control Messages in the RTP Audio-Visual Profile with Feedback \(AVPF\)](#)," RFC 5104, February 2008 ([TXT](#)).

[RFC5888]	Camarillo, G. and H. Schulzrinne, " RTP Payload Format for H.264 Video ," RFC 3984, June 2010 (TXT).
[draft-spittka-payload-rtp-opus]	Spittka, J., Vos, K., and JM. Valin, " RTP Payload Format for Opus Speech and Audio Codec ," draft-spittka-payload-rtp-opus-01 (work in progress), July 2012 (TXT).
[draft-ietf-payload-vp8]	Westin, P., Lundin, H., Glover, M., Uberti, J., and F. Galligan, " RTP Payload Format for VP8 Video ," draft-ietf-payload-vp8-05 (work in progress), August 2012 (TXT).
[RFC3984]	Wenger, S., Hannukseala, M., Stockhammer, T., Westerlund, M., and D. Singer, " RTP Payload Format for H.264 Video ," RFC 3984, February 2005 (TXT).
[RFC5583]	Schierl, T. and S. Wenger, " Signaling Media Decoding Dependency in the Session Description Protocol (SDP) ," RFC 5583, July 2009 (TXT).
[RFC5576]	Lennox, J., Ott, J., and T. Schierl, " Source-Specific Media Attributes in the Session Description Protocol (SDP) ," RFC 5576, June 2009 (TXT).
[draft-ietf-rtcweb-data-channel]	Jesup, R., Loreto, S., and M. Tuexen, " RTCWeb Datagram Connection ," draft-ietf-rtcweb-data-channel-01 (work in progress), September 2012 (TXT).
[draft-ietf-mmusic-sctp-sdp]	Loreto, S. and G. Camarillo, " Stream Control Transmission Protocol (SCTP)-Based Media Transport in the Session Description Protocol (SDP) ," draft-ietf-mmusic-sctp-sdp-03 (work in progress), September 2012 (TXT).
[draft-ietf-mmusic-sdp-bundle-negotiation]	Holmberg, C., Alvestrand, H., and C. Jennings, " Multiplexing Negotiation Using Session Description Protocol (SDP) Port Numbers ," draft-ietf-mmusic-sdp-bundle-negotiation-03 (work in progress), February 2013 (TXT).
[draft-lennox-mmusic-sdp-source-selection]	Lennox, J. and H. Schulzrinne, " Multiplexing Negotiation Using Session Description Protocol (SDP) Port Numbers ," draft-lennox-mmusic-sdp-source-selection-05 (work in progress), October 2012 (TXT).

Authors' Addresses

[TOC](#)

Suhas Nandakumar
Cisco
170 West Tasman Drive
San Jose, CA 95134
USA

Email: snandaku@cisco.com

Cullen Jennings
Cisco
170 West Tasman Drive
San Jose, CA 95134
USA

Phone: +1 408 421-9990

Email: fluffy@cisco.com